




# Antennas

DATA SHEET

## Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

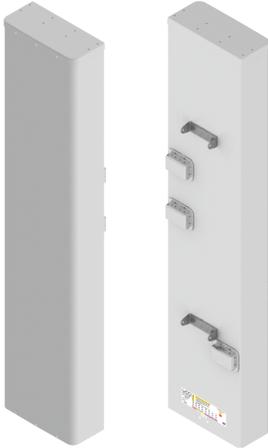

- Eight foot(2.4 m), Hybrid Multiband Beamforming Antenna, deploying a high performing 65° azimuth beamwidth covering 698-896 MHz/1695-2400 MHz frequencies and an 8T8R Beamforming array covering 3300-4200 MHz
- Four wide low band ports covering 698-896 MHz, Four wide mid band ports covering 1695-2400 MHz and Eight wide high band ports covering 3300-4200 MHz, in a single antenna
- Full Spectrum Compliance for 698-896 MHz, 1695-2400 MHz and 3300-4200 MHz
- Provides an 8T8R Beamforming array, with a calibration port, for RRU controlled Azimuth beam control and beamforming, for increased 5G services data throughput and decreased latency, by minimizing interference and increasing signal strength at directed users
- Beamforming array can be deployed with tapering (or without tapering), for improved Azimuth SLL performance
- LTE Optimized FBR, SPR and Boresight/Sector XPD Performance, essential for today's LTE Data Networks
- Exceeds minimum PIM performance requirements
- Equipped with new 4.3-10 connector, which is 40% smaller than traditional 7/16 DIN connector
- Equipped with Four Field Replaceable, integrated AISG 2.0 compliant Remote Electrical Tilt (RET)

### Overview

The CCI Hybrid Multiband Array with 3.5 GHz 8T8R Support is a Sixteen port antenna, with Four wide low band ports covering 698-896 MHz, Four wide mid band ports covering 1695-2400 MHz and Eight wide high band ports covering 3300-4200 MHz. The CCI Hybrid Multiband Array with 3.5 GHz 8T8R Support uses a high performance 65° azimuth beamwidth in the low band and mid band frequencies and an 8T8R Beamforming array in the high band frequencies.

The CCI Hybrid Multiband Beamforming Antenna provides the capability to deploy a Single 4x4 Multiple-input Multiple-output in the low band, Single 4x4 Multiple-input Multiple-output (MIMO) in the mid band and 8T8R Beamforming in the high band. The CCI Hybrid Multiband Beamforming Antenna utilizes three Type 17 RET controllers, with one RET for the Low Band ports, one RET for the Mid Band ports and one RET for the 8T8R Beamforming array.

The CCI Hybrid Multiband Beamforming Antenna, will allow operators to reduce OPEX and CAPEX costs, by having a high performing 8T8R array, integrated into eight port 65° multiband array, all within a single antenna enclosure.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

### Applications

- 8T8R Beamforming, supporting 3.3 - 4.2 GHz, with calibration port
- Single 4X4 MIMO Low Band ports and Single 4x4 MIMO for the Mid Band ports
- With CCI's Hybrid Multiband Beamforming Antennas, wireless providers can connect multiple platforms to a single antenna, reducing tower load, lease expense, deployment time and installation costs



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

#### Electrical

Ports	4 x Low Band Ports for 698-896 MHz	
Frequency Range	698-806 MHz	824-896 MHz
Gain <sup>1</sup>	15.7 dBi	16.6 dBi
Gain (Average)	14.7 dBi	15.6 dBi
Azimuth Beamwidth (-3dB)	72°	62°
Elevation Beamwidth (-3dB)	9.4°	7.8°
Electrical Downtilt	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	<-18 dB	<-16 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB
Front-to-Back Ratio ±20°	> 33 dB	> 35 dB
Cross-Polar Discrimination at Peak	> 25 dB	> 25 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1	
Passive Intermodulation (2x20W)	≤ -153 dBc	
Input Power Continuous Wave (CW)	500 watts	
Polarization	Dual Linear 45°	
Input Impedance	50 ohms	
Lightning Protection	DC Ground	

<sup>1</sup>Peak gain across sub-bands.

Ports	4 x Mid Band Ports for 1695-2400 MHz			
Frequency Range	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2400 MHz
Gain <sup>1</sup>	17.8 dBi	18.2 dBi	18.5 dBi	18.6 dBi
Gain (Average)	16.8 dBi	17.3 dBi	17.7 dBi	17.7 dBi
Azimuth Beamwidth (-3dB)	65°	60°	59°	56°
Elevation Beamwidth (-3dB)	5.7°	5.1°	4.8°	4.1°
Electrical Downtilt	0° to 8°	0° to 8°	0° to 8°	0° to 8°
Elevation Sidelobes (1st Upper)	<-18 dB	<-18 dB	<-18 dB	<-18 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 35 dB
Front-to-Back Ratio ±20°	> 33 dB	> 33 dB	> 33 dB	> 33 dB
Cross-Polar Discrimination at Peak	> 19 dB	> 17 dB	> 18 dB	> 21 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1			
Passive Intermodulation (2x20W)	≤ -153 dBc			
Input Power Continuous Wave (CW)	300 watts			
Polarization	Dual Linear 45°			
Input Impedance	50 ohms			
Lightning Protection	DC Ground			

<sup>1</sup>Peak gain across sub-bands.



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

#### Electrical

Ports	8 x High Band Ports for 3300-4200 MHz			
	Single Column			
Frequency Range	3300-3400 MHz	3450-3550 MHz	3700-4000 MHz	4000-4200 MHz
Gain <sup>1</sup>	15.6 dBi	15.9 dBi	16.3 dBi	16.6 dBi
Gain (Average)	14.8 dBi	15.0 dBi	15.5 dBi	15.6 dBi
Azimuth Beamwidth (-3dB)	91.0° ±15.7°	94.2° ±19.4°	89.5° ±12.0°	91.6° ±10.7°
Elevation Beamwidth (-3dB)	6.7°	6.3°	5.6°	5.1°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	< -20 dB	< -19 dB	< -20 dB	< -19 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 35 dB
Front-to-Back Ratio ±20°	> 31 dB	> 34 dB	> 34 dB	> 33 dB
Cross-Polar Discrimination at Peak	> 25 dB	> 23 dB	> 20 dB	> 17 dB
CoPol Isolation between Columns	> 20 dB	> 22 dB	> 25 dB	> 25 dB
Cross-Polar Isolation	> 20 dB	> 22 dB	> 25 dB	> 25 dB
Coupling level, antenna port to cal port	26 ±2	26 ±2	26 ±2	26 ±2
Max Amplitude difference between antenna ports and Cal port (dB)	< ±1	< ±1	< ±1	< ±1
Max phase difference between antenna ports and Cal port (deg)	< ±7	< ±7	< ±7	< ±7
Voltage Standing Wave Ratio (VSWR)	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave (CW)	100 watts	100 watts	100 watts	100 watts
Polarization	Dual Linear 45°	Dual Linear 45°	Dual Linear 45°	Dual Linear 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground

<sup>1</sup>Peak gain across sub-bands.

Ports	Broadcast and Service Beams			
	Broadcast		Service Beam at 0°*	
Frequency Range	3300-3600 MHz	3700-4200 MHz	3300-3600 MHz	3700-4200 MHz
Gain <sup>1</sup>	17.2 dBi	17.8 dBi	20.8 dBi	21.3 dBi
Gain (Average)	16.6 dBi	16.8 dBi	20.3 dBi	20.6 dBi
Azimuth Beamwidth (-3dB)	65.7° ±5.9°	70.8° ±5.8°	27.3° ±0.9°	25.5° ±1.0°
Elevation Beamwidth (-3dB)	6.7°	5.6°	5.6	
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	< -18 dB	< -19 dB	< -21 dB	< -21 dB
Front-to-Back Ratio @180°	> 38 dB	> 38 dB	> 38 dB	> 38 dB
Front-to-Back Ratio ±20°	> 33 dB	> 34 dB	> 35 dB	> 35 dB

<sup>1</sup>Peak gain across sub-bands.

\* Performance is based on no tapering applied



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

#### Electrical

Ports	Service Beams and Soft BiSector			
	Service Beam at 30°*		Service Beam Soft BiSector	
Frequency Range	3300-3600 MHz	3700-4200 MHz	3300-3600 MHz	3700-4200 MHz
Gain <sup>1</sup>	20.1 dBi	21.0 dBi	19.7 dBi	20.5 dBi
Gain (Average)	19.5 dBi	20.4 dBi	19.2 dBi	20.0 dBi
Azimuth Beamwidth (-3dB)	29.4° ±1.4°	25.6° ±1.6°	30.5° ±1.1°	28.0° ±1.2°
Elevation Beamwidth (-3dB)	6.5°	5.5°	6.5°	5.5°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	< -22 dB	< -21 dB	< -20 dB	< -20 dB
Front-to-Back Ratio @180°	> 38 dB	> 38 dB	> 38 dB	> 38 dB
Front-to-Back Ratio ±20°	> 35 dB	> 35 dB	> 35 dB	> 35 dB

<sup>1</sup>Peak gain across sub-bands.

\* Performance is based on no tapering applied

#### Mechanical

Dimensions (LxWxD)	95.9x20.6x9.2 in (2436x524x234 mm)
Survival Wind Speed	> 150 mph (> 241 kph)
Front Wind Load <sup>1</sup>	324 lbf @ 100 mph    1441 N @ 161 kph
Side Wind Load <sup>1</sup>	105 lbf @ 100 mph    467 N @ 161 kph
Effective Projective Area (EPA), Front <sup>1</sup>	12.9 ft <sup>2</sup> (1.2 m <sup>2</sup> )
Weight *	99.2 lbs (45.0 kg)
RF Connector	16 x 4.3-10 female
Calibration Interface	1 x 4.3-10 female
RET Connectors	1 female / 1 male
RET Interface	8-pin D female / 8-pin D male
Mounting Pole	2 to 5 in (5 to 12 cm)

<sup>1</sup>Windload values calculated using CFD analysis

\* Weight excludes mounting



# Antennas

## SPECIFICATIONS


### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

#### Mechanical


Bottom View

8HBF4R-BUH8NA

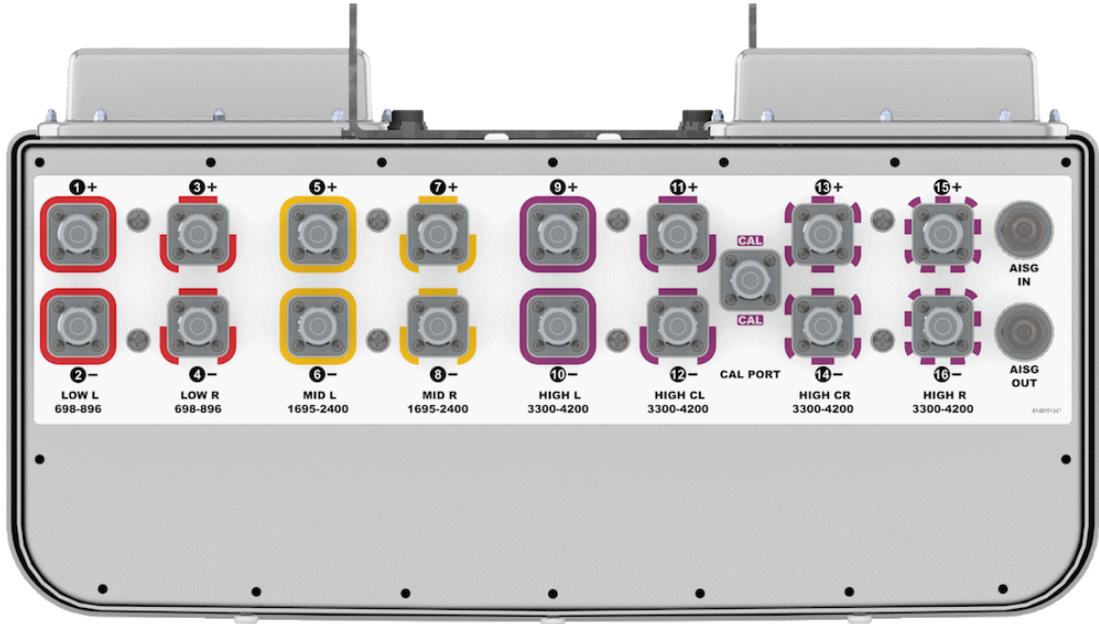

#### Connector Spacing

8HBF4R-BUH8NA

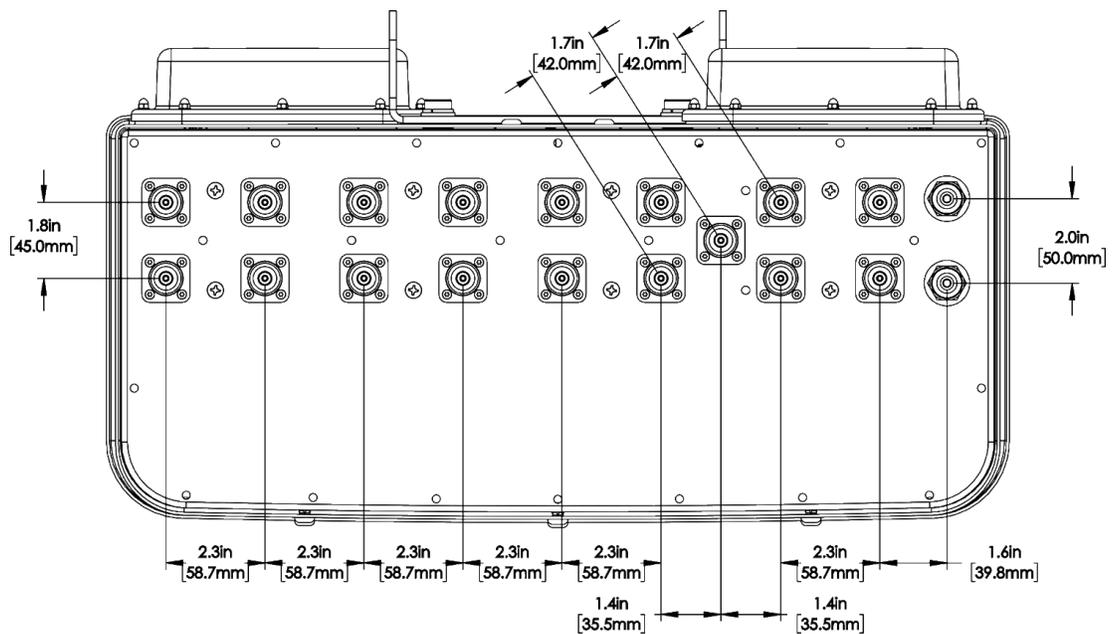



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna


8HBF4R-BUH8NA

Mechanical

RET to Element Configuration

8HBF4R-BUH8NAB Element and RET configuration (Type 17 Internal RET)

**Top of antenna  
Viewed from rear**

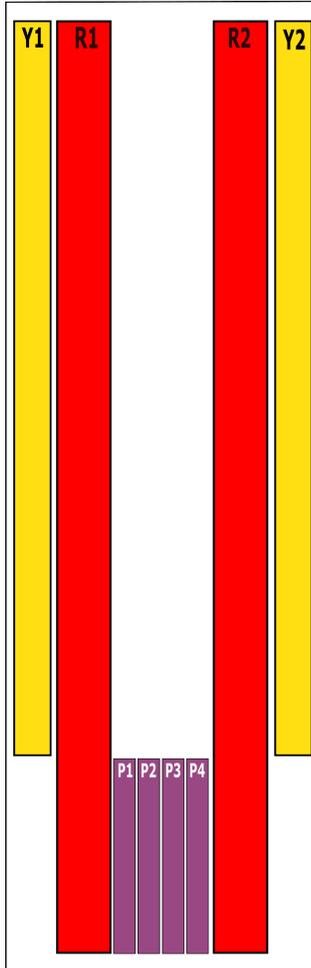

**RET placement  
as viewed from rear  
of antenna**

Top of antenna

MM.2

MM.1

MM.3

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	C1xxxxxxMM.1
R2	3, 4	698-896		
Y1	5, 6	1695-2400	5, 6, 7, 8	C1xxxxxxMM.2
Y2	7, 8	1695-2400		
P1	9, 10	3300-4200	9, 10, 11, 12, 13, 14, 15, 16	C1xxxxxxMM.3
P2	11, 12	3300-4200		
P3	13, 14	3300-4200		
P4	15, 16	3300-4200		



# Antennas


## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna


8HBF4R-BUH8NA

#### Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at [support@cciproducts.com](mailto:support@cciproducts.com)

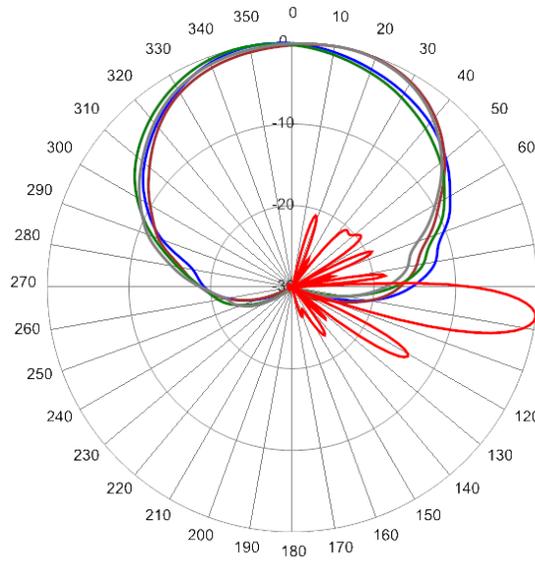


734 MHz Azimuth with Elevation 7°

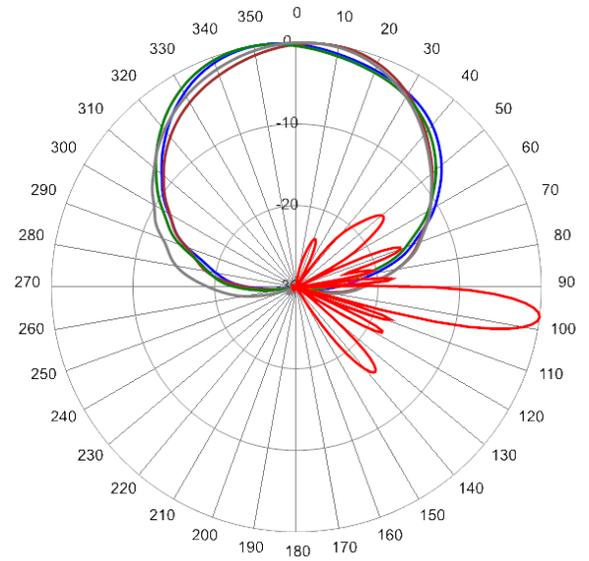

880 MHz Azimuth with Elevation 7°

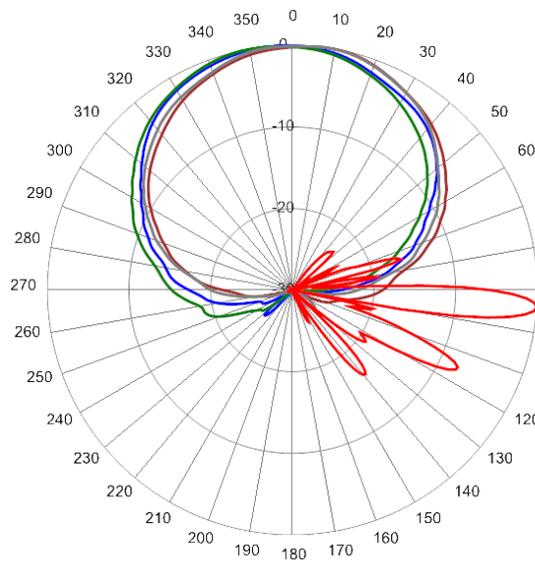

1720 MHz Azimuth with Elevation 4°

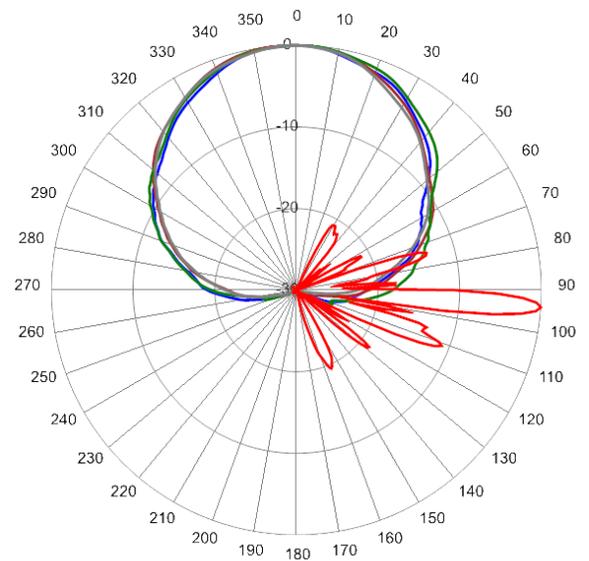

2155 MHz Azimuth with Elevation 4°




# Antennas

SPECIFICATIONS


## Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA


### Typical Antenna Patterns

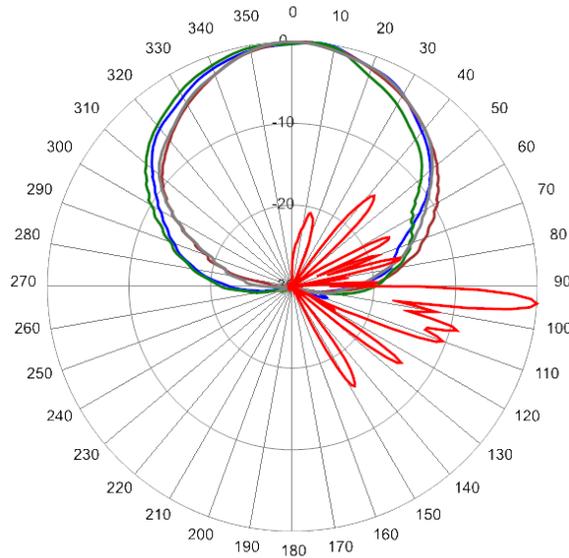

2360 MHz Azimuth with Elevation 4°

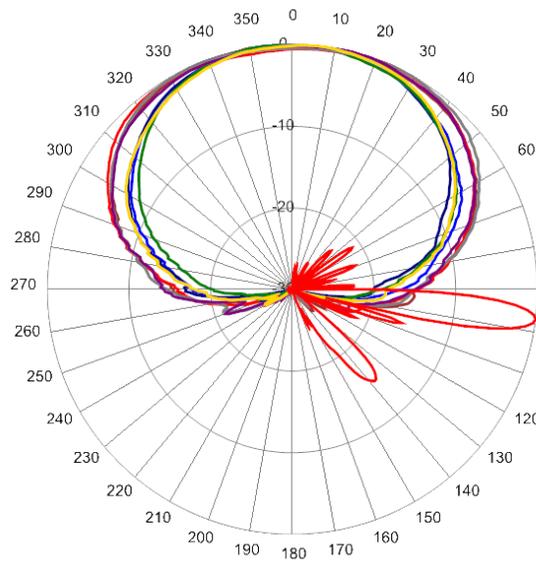

3500 MHz Azimuth with Elevation 7° Single Column

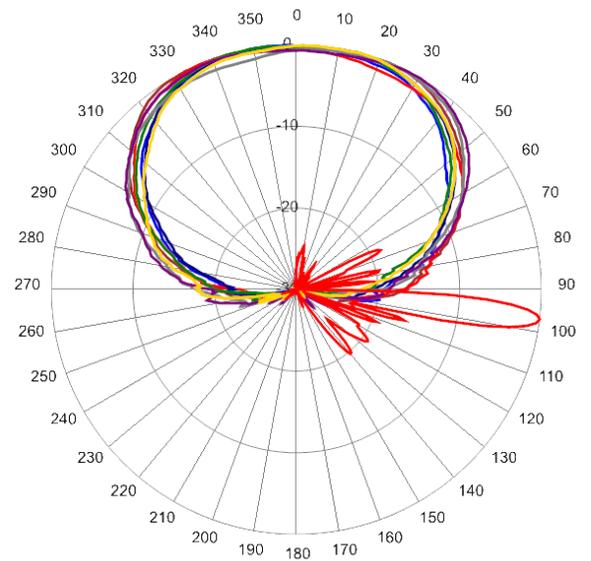

3920 MHz Azimuth with Elevation 7° Single Column




# Antennas

SPECIFICATIONS


## Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA


### Typical Antenna Patterns

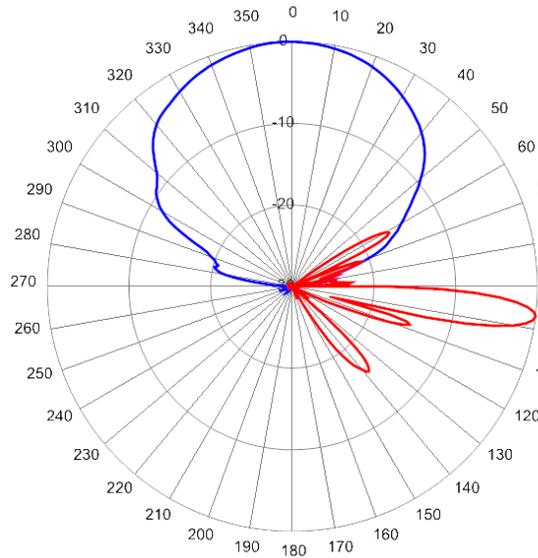


3500 MHz Azimuth with Elevation 7° Broadcast Beam

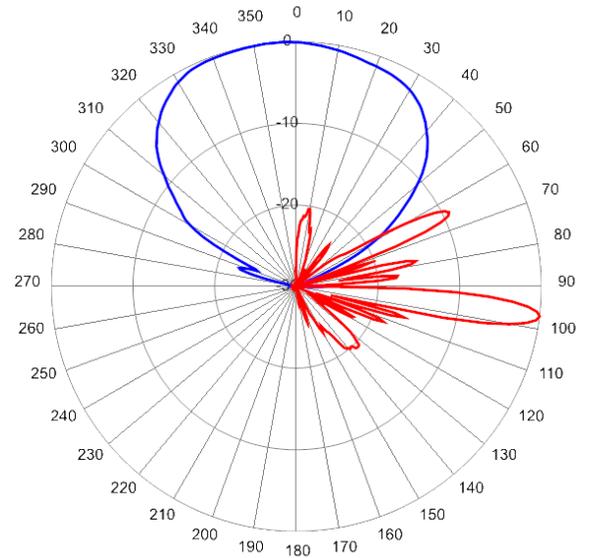

3920 MHz Azimuth with Elevation 7° Broadcast Beam

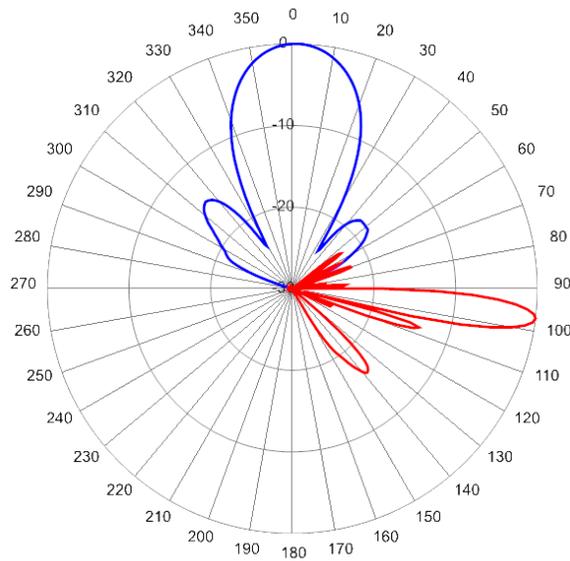

3500 MHz Azimuth 0° with Elevation 7° Service Beam

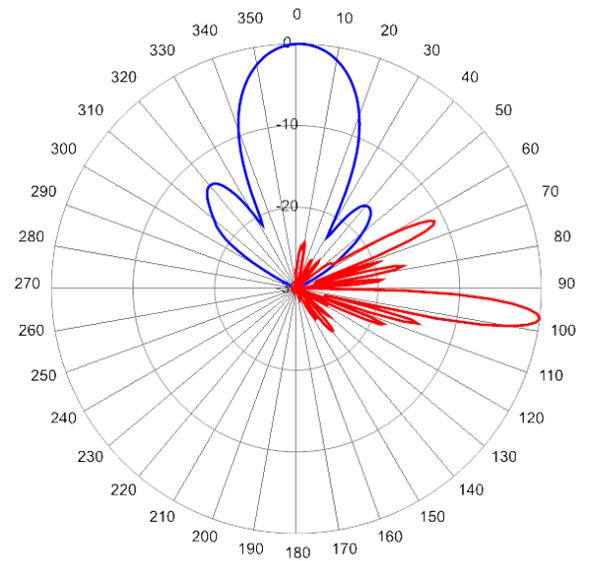

3920 MHz Azimuth 0° with Elevation 7° Service Beam




# Antennas

## SPECIFICATIONS


### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA


#### Typical Antenna Patterns

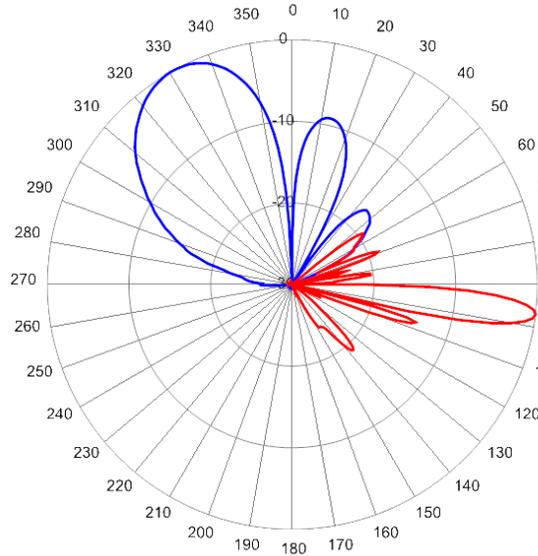


3500 MHz Azimuth 30° with Elevation 7° Service Beam

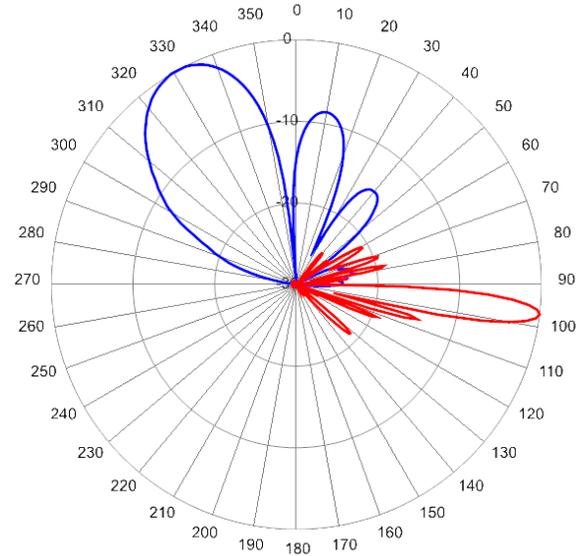

3820 MHz Azimuth 30° with Elevation 7° Service Beam

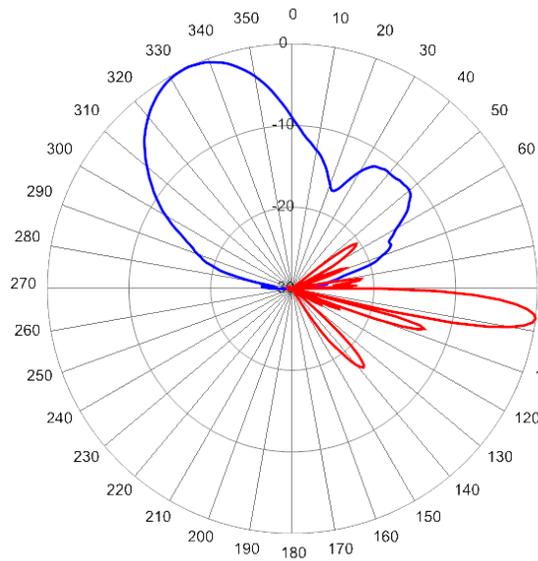

3500 MHz Azimuth with Elevation 7° Soft Split

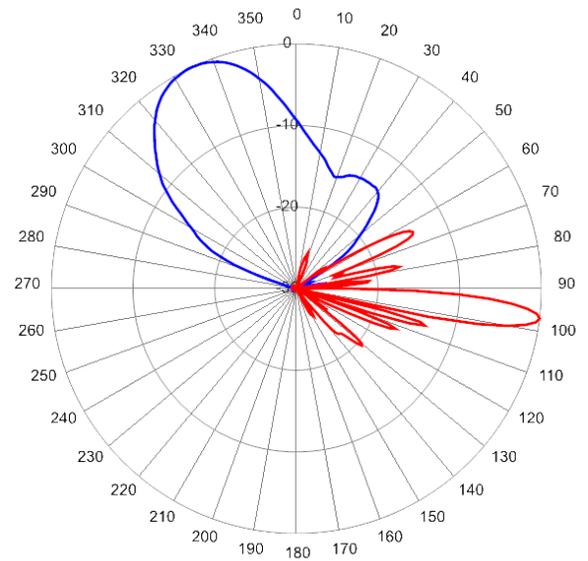

3920 MHz Azimuth with Elevation 7° Soft Split

For detailed information on additional antenna patterns, contact customer support at [support@cciproducts.com](mailto:support@cciproducts.com)



# Antennas

ORDERING

## Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

### Parts & Accessories

---

**8HBF4R-BUH8NAB-K** Eight foot (2.4 m), Hybrid Multiband Beamforming Antenna, 17x 4.3-10 female connectors (including 1 calibration port), 3 factory installed BSA-RET400 RET actuators (Type 17 Internal) and MBK-16 mounting bracket

---

**MBK-16** Mounting bracket kit (top and bottom) with fixed 0° mechanical tilt

---

**MBK-01** Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment

---

**BSA-RET400** Type 17 Remote electrical tilt actuator

---

**AISGC-M-F-10FT** 10 Ft (3 m) Male/Female RRU to Antenna AISG cable

---



# Antennas



ACCESSORIES

## Mounting Bracket Kit

MBK-16

Mechanical

<b>Weight</b>	9.9 lbs (4.5 kg)
<b>Hinge Pitch</b>	47.25 in (1200 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lbs (54 N·m)
<b>Mechanical Tilt</b>	0°

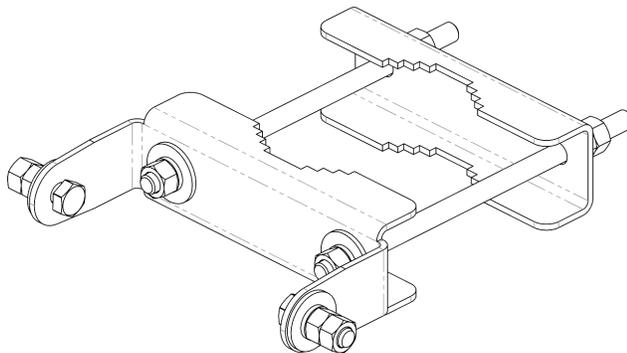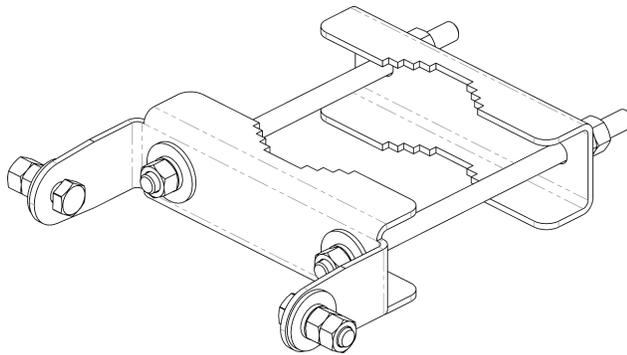

MBK-16 Top and Bottom Bracket



# Antennas


ACCESSORIES

## Mounting Bracket Kit


MBK-01

Mechanical


<b>Weight</b>	12.6 lbs (5.7 kg)
<b>Hinge Pitch</b>	47.25 in (1200 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lb (54 N·m)
<b>Mechanical Tilt Adjustment</b>	0° - 10°



MBK-01 Top Adjustable Bracket

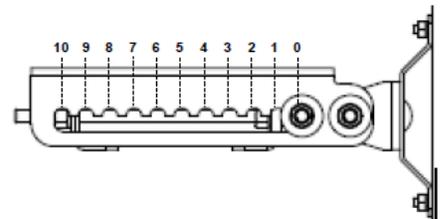

MBK-01 Top Adjustable Bracket Side View



MBK-01 Bottom Fixed Bracket



# Antennas

ACCESSORIES

## Internal Remote Electrical Tilt (iRET)

BSA-RET400

### General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	±0.1°
Temperature Range	-40° C to 70° C


### Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

### Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile  
ABS=Acrylonitrile Butadiene Styrene

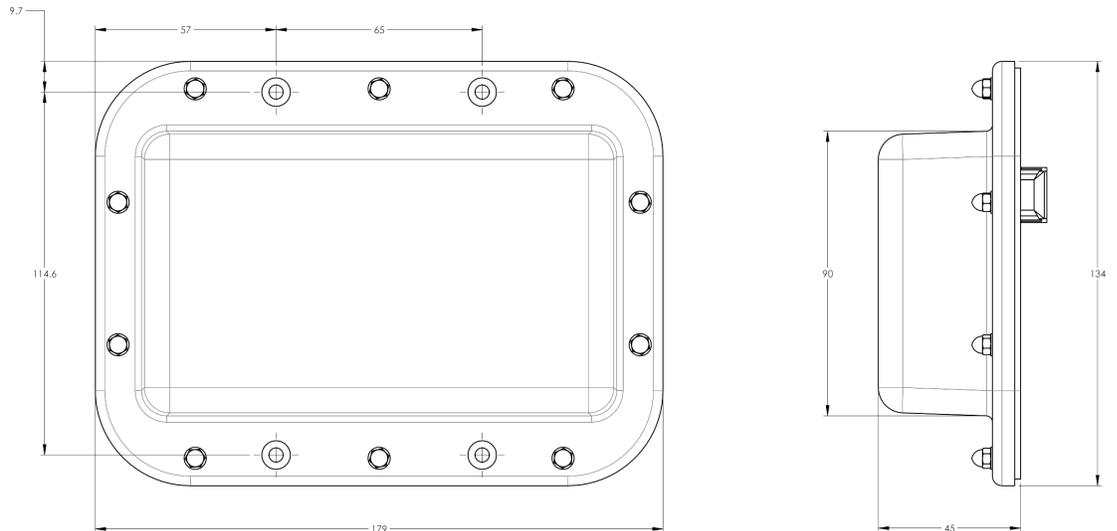



# Antennas

ACCESSORIES

AISG Cable


AISGC-M-F-xFT

## Electrical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cable style	UL2464
Protocol	AISG 1.1 and AISG 2.0
Maximum voltage	300 V
Rated current	5 A at 104° F (40° C)

## Mechanical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cables per kit	1
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female
Tightening torque	Hand tighten only $\approx$ 1.84 ft-lbs (2.5 Nm)
Construction	Shielded (Tinned Copper Braid)
Braid coverage	85%
Jacket Material	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)
Length	See order details
Minimum bend radius	3.15 in (80 mm)

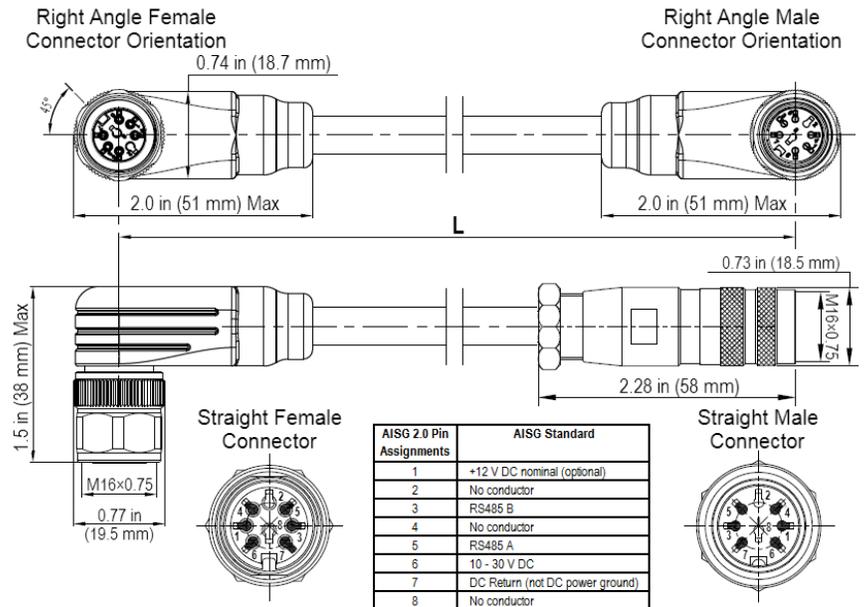

AISG-Male to AISG-Female Jumper Cable



# Antennas

ACCESSORIES

AISG Cable

AISGC-M-F-xFT

Environmental Specifications

Individual Cable Part Number	AISGC-M-F-xFT
Temperature Range	-40° to 80° C
Flammability	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67



# Antennas

## STANDARDS & CERTIFICATIONS

### Hybrid Multiband Beamforming Antenna

8HBF4R-BUH8NA

#### Standards & Compliance

<b>Safety</b>	EN 60950-1, UL 60950-1
<b>Emission</b>	EN 55022
<b>Immunity</b>	EN 55024
<b>Environmental</b>	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

#### Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

