




Antennas

DATA SHEET

Single Band Beamforming Antenna

BFA4R-H3C

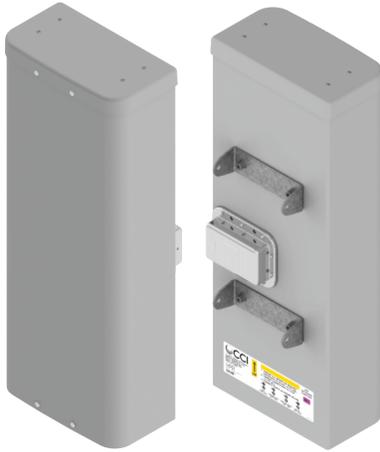

- Three foot (0.9 m), Beamforming Antenna, Deploying a high performing 8T8R Beamforming array covering 3300-3800 MHz
- Eight wide high band ports covering 3300-3800 MHz
- Full Spectrum Compliance for 3300-3800 MHz
- Provides an 8T8R Beamforming array, with a calibration port, for RRU controlled Azimuth beam control and beamforming, for increased 5G services data throughput and decreased latency, by minimizing interference and increasing signal strength at directed users
- Beamforming array can be deployed with tapering (or without tapering), for improved Azimuth SLL performance
- Exceeds minimum PIM performance requirements
- Equipped with new 4.3-10 connector, which is 40% smaller than traditional 7/16 DIN connector
- Equipped with One Field Replaceable, integrated AISG 2.0 compliant Remote Electrical Tilt (RET)

Overview

The CCI Beamforming Array is an Eight port antenna, deploying a high performance array across four single columns, covering 3300-3800 MHz. The CCI Beamforming Antenna utilizes One Type 17 RET controller, with RET control for the 8T8R Beamforming array, across all four columns.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- 8T8R Beamforming, supporting 3.3 – 3.8 GHz, with calibration port
- With CCI's Beamforming Antennas, wireless providers can deploy 8T8R Beamforming for increased throughput and capacity, using multiple high gain and narrow beams to connect to multiple users, within a single adaptive beamforming array



Antennas

SPECIFICATIONS

Single Band Beamforming Antenna

BFA4R-H3C

Electrical

Ports	8 × High Band Ports for 3300-3800 MHz
	Single Column
Frequency Range	3300-3800 MHz
Gain ¹	17.1 dBi
Gain (Average) ²	15.8 dBi
Azimuth Beamwidth (-3dB)	90° ±20.3°
Elevation Beamwidth (-3dB)	5.7°
Electrical Downtilt	2° to 12°
Elevation Sidelobes (1st Upper)	<-18 dB
Front-to-Back Ratio @180°	> 35 dB
Front-to-Back Ratio ±20°	> 32 dB
Cross-Polar Discrimination at Peak	> 20 dB
CoPol Isolation between Columns	> 25 dB
Cross-Polar Isolation	> 25 dB
Coupling level, antenna port to cal port	26 ±2
Max Amplitude difference between antenna ports and Cal port (dB)	< ±1
Max phase difference between antenna ports and Cal port (deg)	< ±7
Voltage Standing Wave Ratio (VSWR)	< 1.5:1
Passive Intermodulation (2×20W)	≤ -140 dBc
Input Power Continuous Wave (CW)	100 watts
Polarization	Dual Linear 45°
Input Impedance	50 ohms
Lightning Protection	DC Ground

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

Ports	Broadcast and Service Beams			
	Broadcast	Service Beam at 0°*	Service Beam at 30°*	Service Beam Soft Bisector
Frequency Range	3300-3800 MHz	3300-3800 MHz	3300-3800 MHz	3300-3800 MHz
Gain ¹	17.4 dBi	21.2 dBi	21.2 dBi	20.4 dBi
Gain (Average) ²	16.6 dBi	20.4 dBi	20.7 dBi	19.8 dBi
Azimuth Beamwidth (-3dB)	67.3° ±3.9°	25.2° ±1.0°	25.4° ±1.5°	29.7° ±1.2°
Elevation Beamwidth (-3dB)	6.0°	6.1°	5.9°	6.1°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	<-18 dB	<-18 dB	<-17 dB	<-18 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 38 dB	> 35 dB
Front-to-Back Ratio ±20°	> 30 dB	> 32 dB	> 32 dB	> 32 dB

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

* Performance is based on no tapering applied



Antennas

SPECIFICATIONS

Single Band Beamforming Antenna

BFA4R-H3C


Mechanical

Dimensions (LxWxD)	33.9x13.1x7.0 in (861x332x178 mm)	
Survival Wind Speed	> 150 mph (> 241 kph)	
Front Wind Load¹	53 lbf @ 100 mph	236 N @ 161 kph
Side Wind Load¹	23 lbf @ 100 mph	101 N @ 161 kph
Effective Projective Area (EPA), Front¹	2.1 ft ² (0.2 m ²)	
Weight*	26.0 lbs (11.8 kg)	
RF Connector	8 x 4.3-10 female	
Calibration Interface	4.3-10 female	
RET Connectors	1 female / 1 male	
RET Interface	8-pin D female / 8-pin D male	
Mounting Pole	2 to 5 in (5 to 12 cm)	

¹Windload values calculated using CFD analysis
 * Weight excludes mounting

Bottom View

BFA4R-H3CA

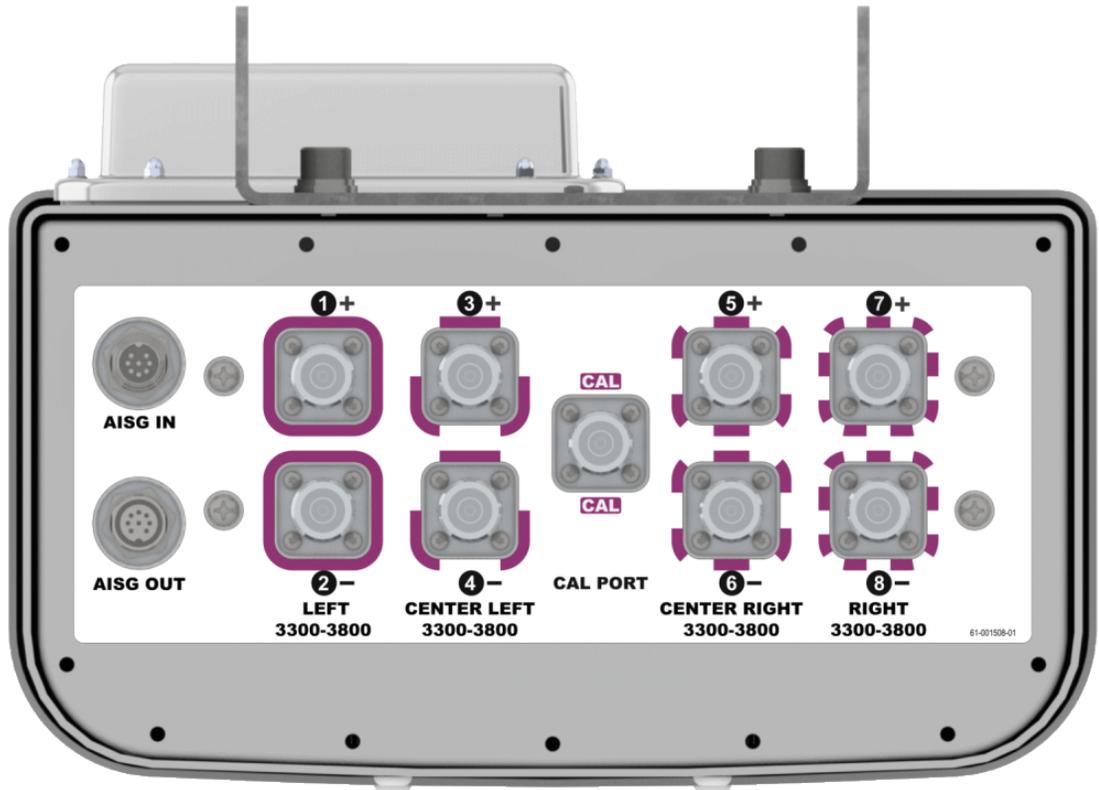



Antennas


SPECIFICATIONS

Single Band Beamforming Antenna

BFA4R-H3C

Mechanical

Connector Spacing

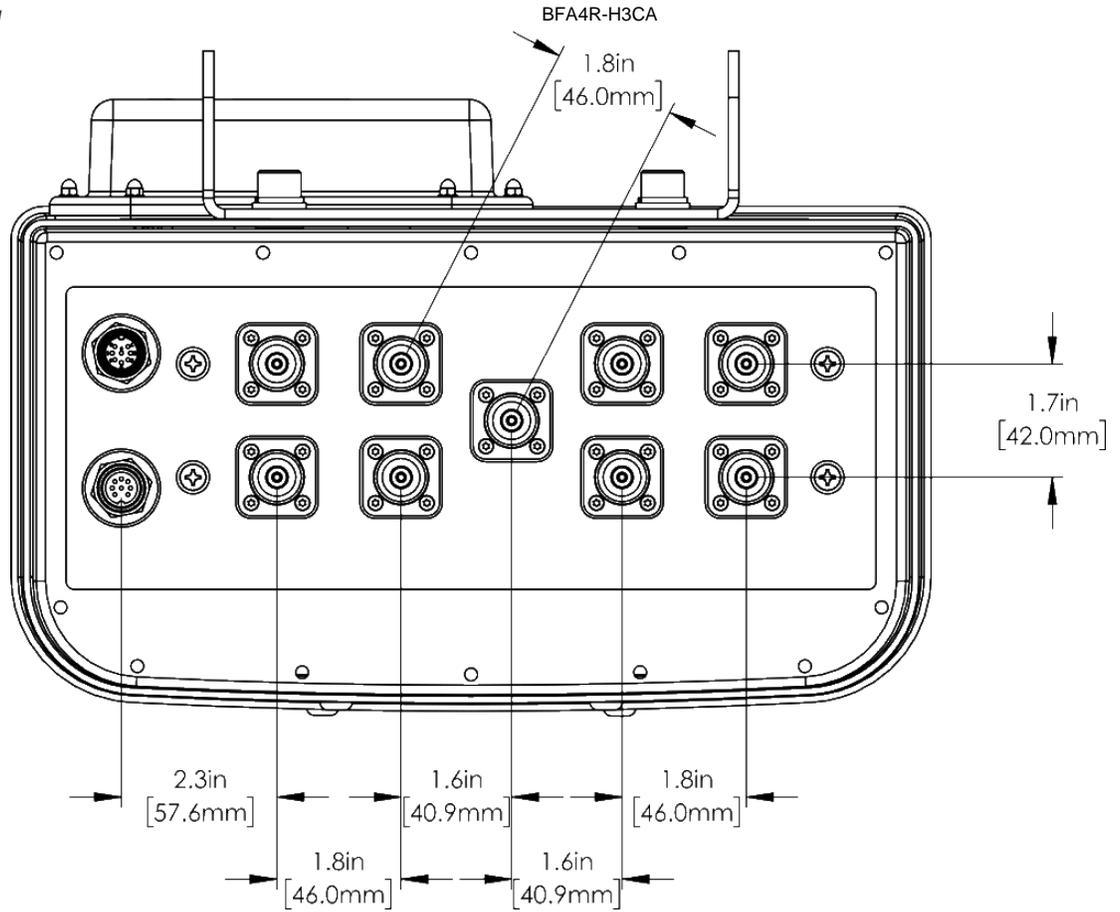



Antennas

SPECIFICATIONS

Single Band Beamforming Antenna


BFA4R-H3C

Mechanical

RET to Element Configuration

BFA4R-H3CA Element and RET configuration (Type 17 Internal RET)

Element arrays as viewed from rear of antenna

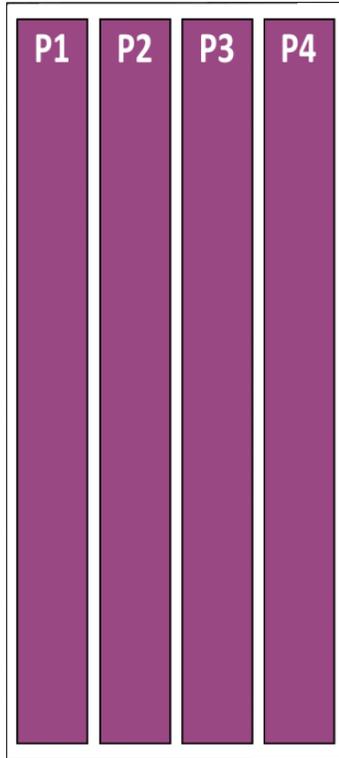

RET placement as viewed from rear of antenna

Top of antenna



MM.1

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
P1	1, 2	3300-3800	1, 2, 3, 4, 5, 6, 7, 8	CIxxxxxxMM.1
P2	3, 4	3300-3800		
P3	5, 6	3300-3800		
P4	7, 8	3300-3800		



Antennas


SPECIFICATIONS

Single Band Beamforming Antenna


BFA4R-H3C

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

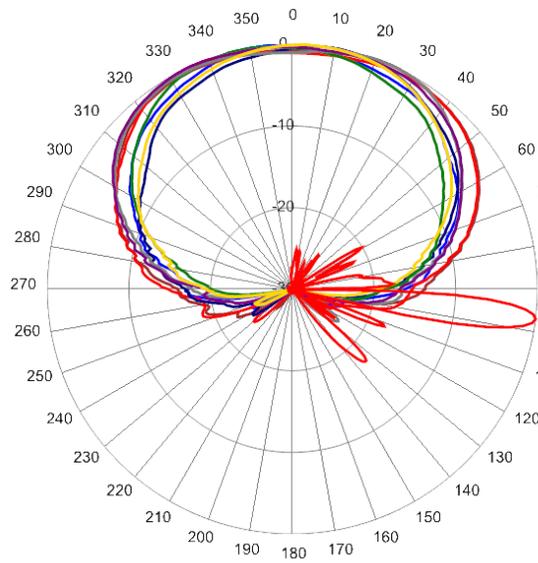

3550 MHz Azimuth with Elevation 7° Single Column

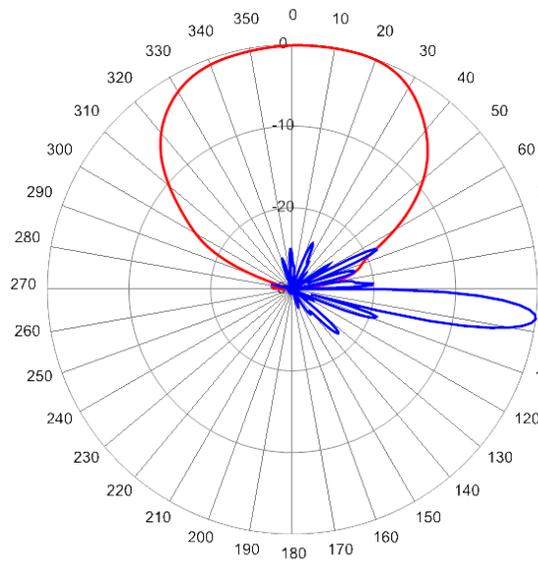

3550 MHz Azimuth with Elevation 7° Broadcast Beam

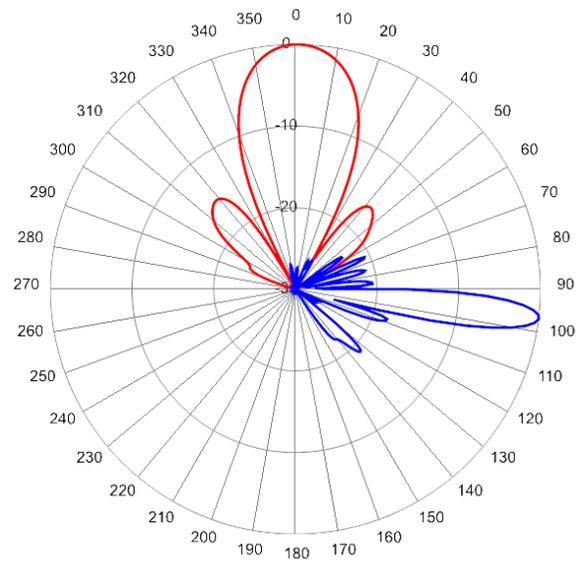

3550 MHz Azimuth 0° with Elevation 7° Service Beam




Antennas

SPECIFICATIONS


Single Band Beamforming Antenna

BFA4R-H3C

Typical Antenna Patterns

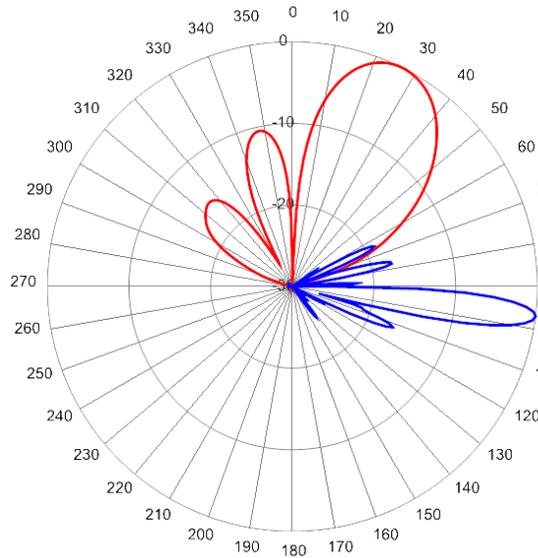

3500 MHz Azimuth 30° with Elevation 7° Service Beam

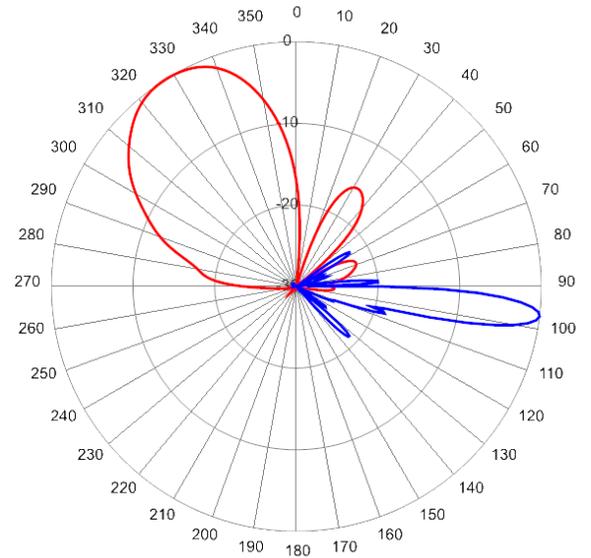

3500 MHz Azimuth with Elevation 7° Soft Split Beam



Antennas

ORDERING

Single Band Beamforming Antenna

BFA4R-H3C

Parts & Accessories

BFA4R-H3CA-K Three foot (0.9 m) beam forming antenna with 90° azimuth single column beamwidth, 9x 4.3-10 female connectors (including 1 calibration port), 1 factory installed BSA-RET400 RET actuators (Type 17 Internal) and MBK-03 mounting bracket

MBK-03 Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment

BSA-RET400 Type 17 remote electrical tilt actuator

AISGC-M-F-10FT 10 Ft (3 m) Male/Female RRU to Antenna AISG cable



Antennas


ACCESSORIES

Mounting Bracket Kit


MBK-03

Mechanical


Weight	9.8 lbs (4.4 kg)
Hinge Pitch	13 in (330 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M10
Installation Torque	15 ft-lbs (20 N·m)
Mechanical Tilt Adjustment	0° - 12°

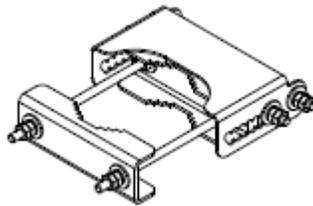

MBK-03 Top Adjustable Bracket

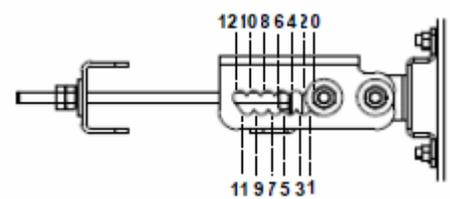

MBK-03 Top Adjustable Bracket Side View

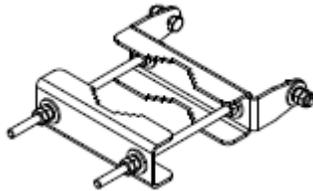

MBK-03 Bottom Fixed Bracket



Antennas

ACCESSORIES

Internal Remote Electrical Tilt (iRET)

BSA-RET400

General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	±0.1°
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

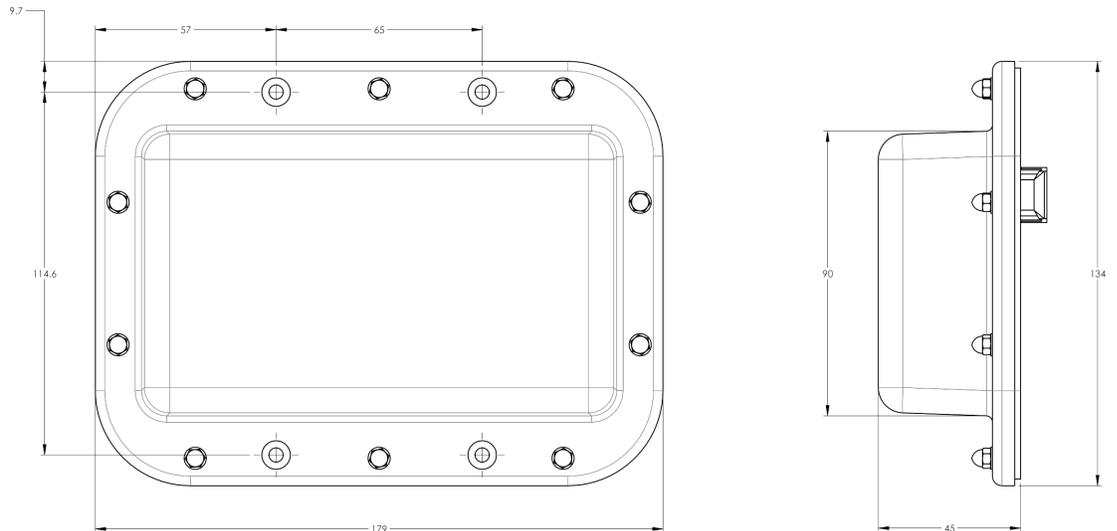



Antennas

ACCESSORIES

AISG Cable


AISGC-M-F-xFT

Electrical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cable style	UL2464
Protocol	AISG 1.1 and AISG 2.0
Maximum voltage	300 V
Rated current	5 A at 104° F (40° C)

Mechanical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cables per kit	1
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female
Tightening torque	Hand tighten only \approx 1.84 ft-lbs (2.5 Nm)
Construction	Shielded (Tinned Copper Braid)
Braid coverage	85%
Jacket Material	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)
Length	See order details
Minimum bend radius	3.15 in (80 mm)

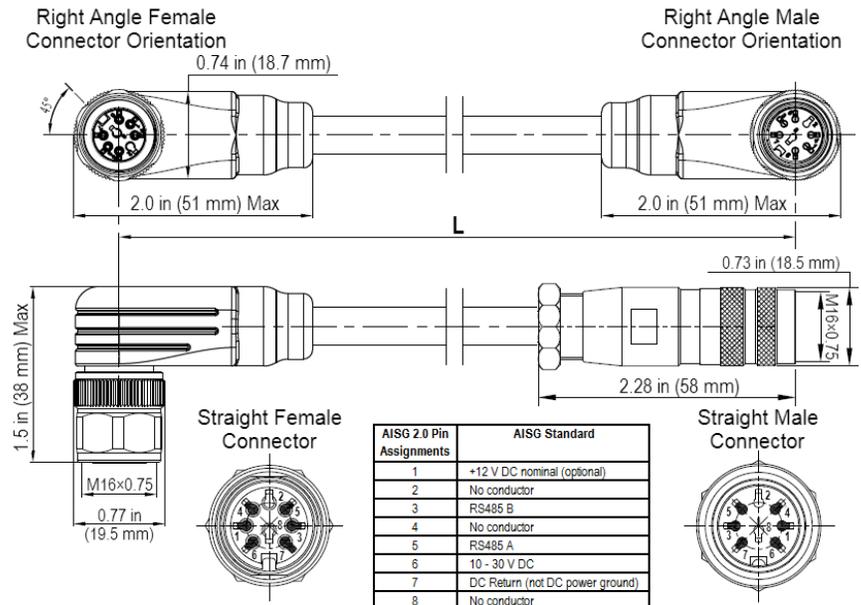

AISG-Male to AISG-Female Jumper Cable



Antennas

ACCESSORIES

AISG Cable

AISGC-M-F-xFT

Environmental Specifications

Individual Cable Part Number	AISGC-M-F-xFT
Temperature Range	-40° to 80° C
Flammability	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67



Antennas

STANDARDS & CERTIFICATIONS

Single Band Beamforming Antenna

BFA4R-H3C

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001



CCI

Communication Components Inc.

EXTENDING WIRELESS PERFORMANCE