



Antennas

DATA SHEET

AISG Cable Kit

CBK-AG-RRU-003



- AISG 1.1 and 2.0 compliant control cables
- Offset keying for right angle cables
- IP67 outdoor ingress protection (when properly mated)
- Flame retardant per UL 1581 VW-1
- Matte polyurethane jacket (Black)
- Connectors 2 x 8 pin (male/female) per IEC 60130-9
- Tinned copper braid shield material

Overview

CCI's Two RET antenna to remote radio unit (RRU) AISG Cable Kits provides all the required cables for the successful deployment of CCI's models that have larger Remote Electrical Tilt (RET) actuators spacing then normal. All of the control cables included in the kit are AISG 1.1 and AISG 2.0 compliant. The 16 foot AISG cables enable connection from the RRU to the antenna, while the 27" AISG cable are for daisy chaining between RET actuators.



Antennas

SPECIFICATIONS


AISG Cable Kit

CBK-AG-RRU-003

Electrical/Mechanical/Environmental Specifications

	RET to RET Cables	RRU to Antenna Cables
Individual Cable Part Number	AISGC-M-F-27	AISGC-M-F-16FT
Cable style	UL2464	
Protocol	AISG 1.1 and AISG 2.0	
Maximum voltage	300 V	
Rated current	5 A at 104° F (40° C)	
Temperature Range	-40° to 80° C	
Flammability	UL 1581 VW-1	
Ingress Protection	IEC 60529:2001, IP67	
Tightening torque	Hand tighten only $\approx$ 1.84 ft-lbs (2.5 N·m)	
Construction	Shielded (Tinned Copper Braid)	
Braid coverage	85%	
Jacket Material	Matte Polyurethane (Black)	
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464	
Cable Diameter	0.307 in (7.8 mm)	
Minimum bend radius	3.9 in (100 mm)	
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female	
Length	27 in (686 mm)	196 in (5 m)
Weight	0.33 lbs (0.15 kg)	0.69 lbs (0.31 kg)
Cables per kit	1	1

Mechanical Specifications

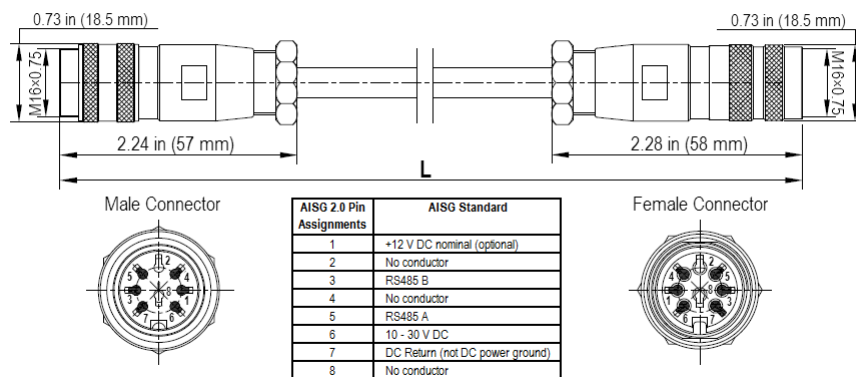

AISG-Male to AISG-Female Jumper Cable



Antennas

ORDERING

AISG Cable Kit

CBK-AG-RRU-003

Parts & Accessories

Kit Part Number	CBK-AG-RRU-003
Number of Cables	2
Overall Length	223 in (5686 mm)
Overall Weight	1.0 lbs (0.5 kg)