



Antennas

DATA SHEET

Six Beam Special Events Antenna

MBA6-9F-V-H3



- Three foot (0.6 m) tall, single panel design supporting six beams without mount changes
- Dual +45° and -45° cross-polarization for each beam pair
- Separate beams support 6 sub-sectors
- Rugged, weather resistant and highly reliable internal design
- Enables efficient evolution of wireless networks
- Increase site capacity through higher order sectorization
- Avoid carrier-adds and building of new capacity sites
- Boosts data throughput by lowering interference
- Patented beam shaping technology maximizes coverage
- Optimized beam crossover and spacing for maximum throughput

Overview

The CCI Six-Beam Special Events Antenna is an LTE ready multi-beam antenna that supports multiple sectors (6) from a single antenna. This Six-Beam Antenna is intended for use at sporting and entertainment venues where social media and the ability to share photos and videos demand high capacity and high data rates. This Six-beam antenna has one row of six dual +45° and -45° cross-polarized beam pairs, each roughly 15 degrees apart that are used to segment large audiences into multiple sectors. The antenna enables maximum spectrum re-use by sectorization, providing as much as nine times increase in network capacity. Our unique beam shaping technology provides fast roll off between beams, minimizing interference between sectors thus increasing the carrier to interference plus noise (CINR) ratio and lowering soft handover losses in LTE networks. Such an approach enhances data transfer rates within LTE network sectors and addresses "hotspots" in mobile wireless operator networks.

The single panel design of the CCI Six-Beam Special Event Antenna offers the opportunity to reduce antenna count and directly replaces multiple narrow beam antennas. The antenna minimizes the need for optimization as each beam is spaced optimally for maximum throughput thus providing significant CAPEX and OPEX cost savings.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- Upgrade of data-throughput or capacity constrained sites
- Antenna intended for use at sporting and entertainment venues



Antennas

SPECIFICATIONS

Six Beam Special Events Antenna

MBA6-9F-V-H3

Electrical


	Ports	
	12 x High Band Ports for 2300-2690 MHz	
Frequency Range	2300-2400 MHz	2496-2690 MHz
Gain	22.1 dBi	22.6 dBi
Azimuth Beamwidth (-3dB)	9.2°	8.2°
Azimuth Beam Crossover	-10.5 dB	-10.5 dB
Elevation Beamwidth (-3dB)	12.3°	10.9°
Electrical Downtilt	4°	4°
Elevation Sidelobes (1st Upper)	< -20 dB	< -18 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB
Cross-Polar Port-to-Port Isolation	> 30 dB	> 30 dB
Interbeam Co-Pol Isolation (Adjacent Beams)	> 15 dB	> 15 dB
Interbeam Co-Pol Isolation (Non-Adjacent Beams)	> 12.5 dB	> 13.5 dB
Voltage Standing Wave Ratio(VSWR)	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave per Port	200 watts	200 watts
Polarization	Dual Pol 45°	Dual Pol 45°
Input Impedance	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground

Mechanical

Dimensions (LxWxD)	24.7x38.2x6.4 in (628x970x163 mm)
Survival Wind Speed	> 125 mph (> 201 kph)
Front Wind Load	201 lbs (896 N) @ 100 mph (161 kph)
Side Wind Load	36 lbs (158 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	7.9 ft ² (0.7 m ²)
Weight *	50.7 lbs (23.0 kg)
Connector	12 x 7-16 DIN female long neck
Mounting Pole	2 to 5 in (5 to 12 cm) (x2)
Mounting Pole spacing	25.6 in (650 mm)

* Weight excludes mounting

Bottom View

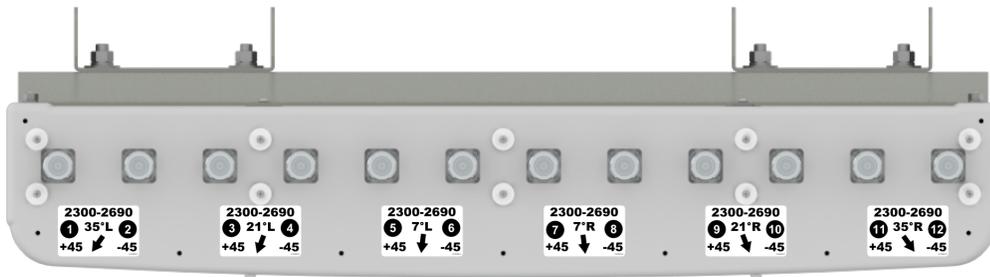



Antennas


SPECIFICATIONS

Six Beam Special Events Antenna

MBA6-9F-V-H3

Mechanical

Connector Spacing

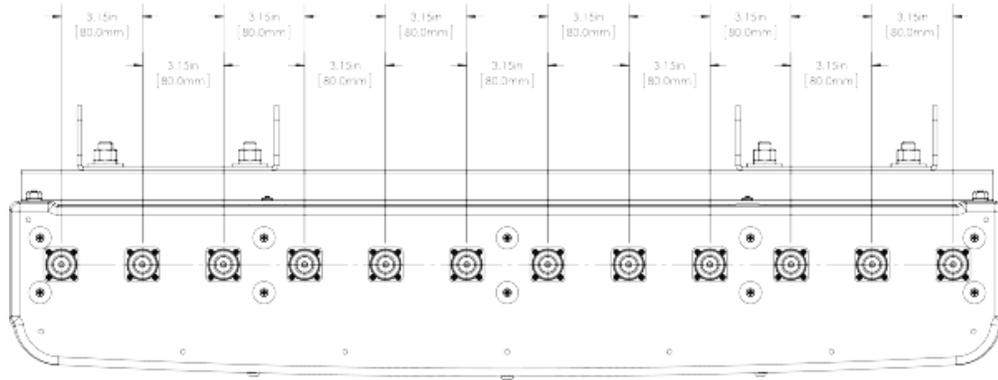



Antennas


SPECIFICATIONS

Six Beam Special Events Antenna


MBA6-9F-V-H3

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

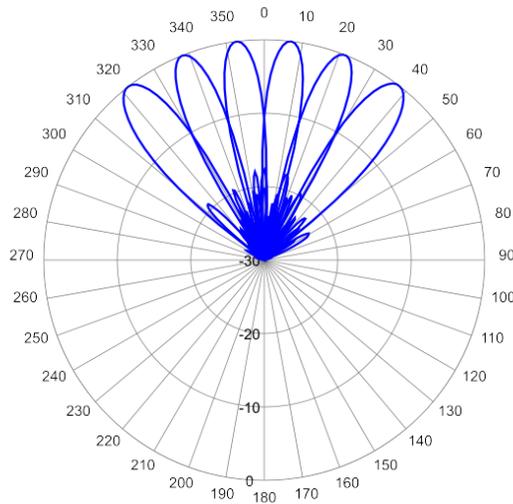


2360 MHz Azimuth

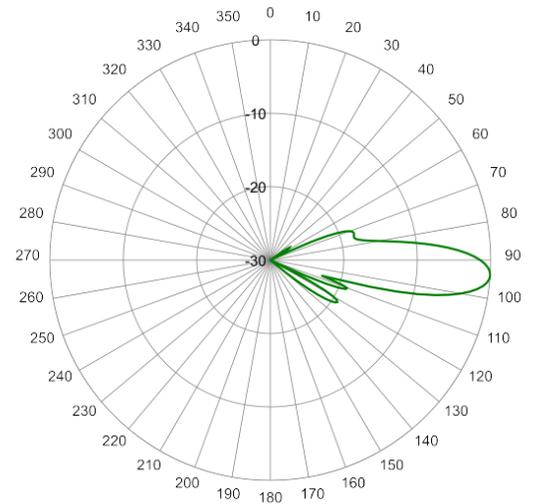

2360 MHz Elevation 4°

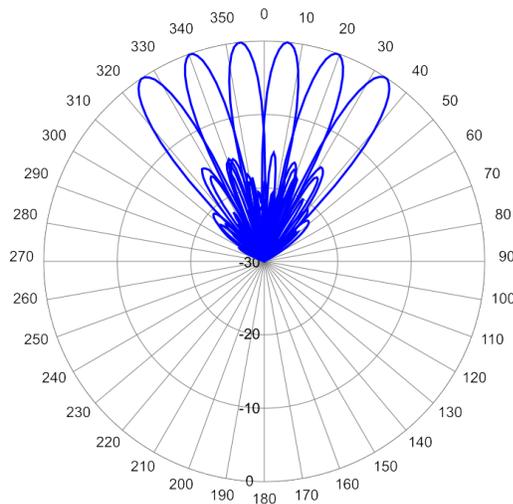

2640 MHz Azimuth

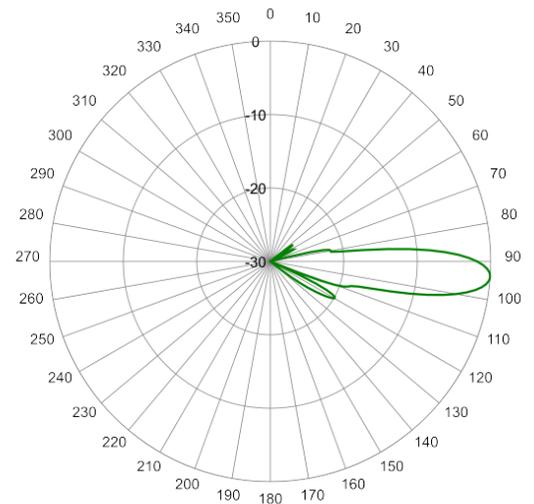

2640 MHz Elevation 4°



Antennas

ORDERING

Six Beam Special Events Antenna

MBA6-9F-V-H3

Parts & Accessories

MBA6-9F-V-H3 3' (0.6 m) Special Events Six-Beam Antenna with Fixed Electrical Tilt

MBA6-9F-V-H3-K 3' (0.6 m) Antenna and 2x MBK-03 Mounting Bracket

MBK-03 x 2 Mounting bracket kit (top and bottom) with 0° to 12° mechanical tilt adjustment



Antennas


ACCESSORIES

Mounting Bracket Kit


MBK-03

Mechanical


Weight	9.8 lbs (4.4 kg)
Hinge Pitch	13 in (330 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M10
Installation Torque	15 ft-lbs (20 Nm)
Mechanical Tilt Adjustment	0° - 12°

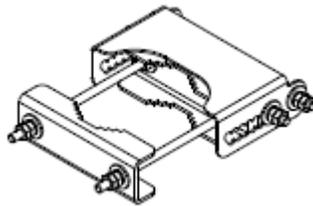

MBK-03 Top Adjustable Bracket

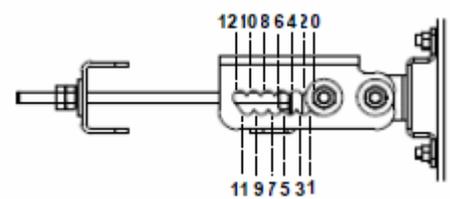

MBK-03 Top Adjustable Bracket Side View

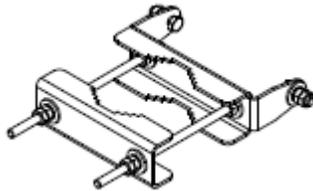

MBK-03 Bottom Fixed Bracket



Antennas

STANDARDS & CERTIFICATIONS

Six Beam Special Events Antenna

MBA6-9F-V-H3

Standards & Compliance

Environmental IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5,
 IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14,
 IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29,
 IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64,
 GR-63-CORE 4.3.1, EN 60529, IP 24

Certifications

Federal Communication Commission (FCC) Part 15 Class B, ISO 9001



CCI Communication Components Inc.
EXTENDING WIRELESS PERFORMANCE