


BFA4R-H3CA (Type 17 RET Configuration Only)

Element arrays as viewed from rear of antenna

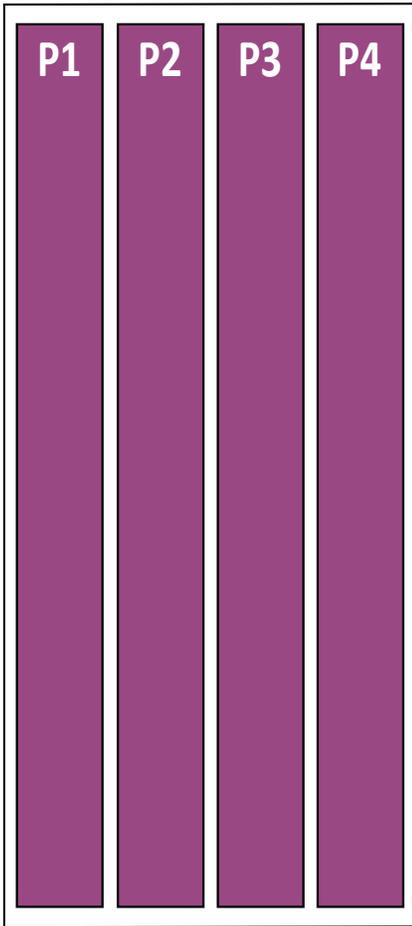

RET placement as viewed from rear of antenna

Top of antenna



MM.1

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
P1	1, 2	3300-3800	1, 2, 3, 4, 5, 6, 7, 8	C1xxxxxxMM.1
P2	3, 4	3300-3800		
P3	5, 6	3300-3800		
P4	7, 8	3300-3800		