


DMP65R-BU4EA

(Type 17 RET Configuration Only)

**RET placement
as viewed from rear
of antenna**

Top of antenna

**Top of antenna
Viewed from rear**

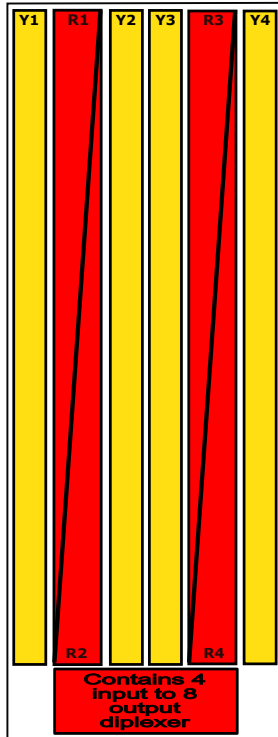

MM.1

698-798 MHz (700 RET)
Ports 1, 2, 3 & 4
(R1 & R3)

MM.3

1695-2400 MHz
Ports 5, 6, 7 & 8
(Y1 & Y2)

MM.4

1695-2400 MHz
Ports 9, 10, 11 & 12
(Y3 & Y4)

MM.2

824-896 MHz (850 RET)
Ports 1, 2, 3 & 4
(R2 & R4)

Array	Ports	Freq (MHz)	Ports controlled by dedicated RET	AISG RET UID
R1	1, 2	698-798	1, 2, 3, 4	ClxxxxxxxMM.1
R3	3, 4			
R2	1, 2	824-896	1, 2, 3, 4	ClxxxxxxxMM.2
R4	3, 4			
Y1	5, 6	1695-2400	5, 6, 7, 8	ClxxxxxxxMM.3
Y2	7, 8			
Y3	9, 10	1695-2400	9, 10, 11, 12	ClxxxxxxxMM.4
Y4	11, 12			

Port Label

