
## TPA45R-KE6BA (Type 17 RET Configuration Only)



## Top of antenna Viewed from rear

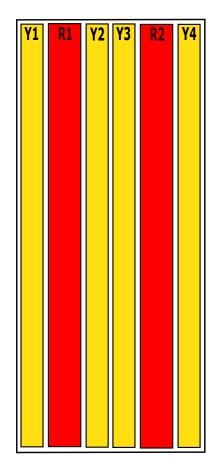

## RET placement as viewed from rear of antenna

Top of antenna

MM.2

**MM.3** 

MM.1

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-960	1, 2, 3, 4	ClxxxxxxMM.1
R2	3, 4	698-960		
Y1	5, 6	1695-2690	E 6 7 9	Character NANA 2
<b>Y3</b>	7, 8	1695-2690	5, 6, 7, 8	ClxxxxxMM.2
Y2	9, 10	1695-2690	9, 10, 11, 12	ClxxxxxxMM.3
Y4	11, 12	1695-2690	9, 10, 11, 12	CIXXXXXXIVIIVI.3