

- Four foot (1.3 m) six port antenna with a 33° azimuth beamwidth covering 698-896 MHz and 1695-2180 MHz
- Four high band ports and two low band ports in one antenna
- Sharp elevation beam
- Excellent elevation side-lobe performance
- Excellent MIMO performance due to array spacing
- Rugged, reliable design with excellent PIM performance
- A multi-network solution in one radome
- 3GPP/AISG 2.0 compliant RET system with daisy chaining capability
- Reduces tower loading
- Frees up space for tower mounted E-nodes
- Single radome with six ports
- All Band design simplifies radio assignments
- Sharp elevation beam eases network planning

Overview

The CCI Hexport 33° Multi-Band Antenna Array is a 6-port antenna with Multi-Band (One Low Band (698-896 MHz) and Two High Bands (1695-2180 MHz)) coverage. With four high band ports and two low band ports, our Hexport antenna is ready for 4X4 high band MIMO.

Modern networks demand high performance, consequently CCI has incorporated several new and innovative design techniques to provide an antenna with excellent side-lobe performance, sharp elevation beams, and high front to back ratio.

Multiple networks can now be connected to a single antenna, reducing tower loading and leasing expense, while decreasing deployment time and installation cost.

Full band capability for 700 MHz , Cellular 850 MHz, PCS 1900 MHz, and AWS 1710/2155 MHz in a single enclosure.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- 4x4 MIMO for the high band and 2x2 MIMO for the low band
- Adding additional capacity without adding additional antennas
- Densely populated macro sites
- Cosite current, and next-generation basestation technologies on the same antenna



HexPort Multi-Band Antenna

HPA-33I-BWW-H4

SPECIFICATIONS

Electrical

Ports	2 × Low Band Ports for 698-896 MHz		4 × High Band Ports for 1695-2180 MHz		
Frequency Range	698-806 MHz	824-896 MHz	1850-1990 MHz	1695-1755/2110-2180 MHz	
Gain (dBi)	15.3	16.5	18.1	17.4	18.5
Azimuth Beamwidth (-3 dB) (°)	38	33	33	35	31
Elevation Beamwidth (-3 dB) (°)	18.3	15.8	8.7	9.6	7.7
Electrical Downtilt (°)	2 to 10	2 to 10	0 to 8	0 to 8	0 to 8
Elevation Sidelobes (1st Upper) (dB)	< -18	< -18	< -18	< -18	< -17
Front-to-Back Ratio @180° (dB)	> 30	> 30	> 35	> 35	> 35
Cross-Polar Discrimination (at Peak) (dB)	> 25	> 25	> 25	> 25	> 22
Cross-Polar Port-to-Port Isolation (dB)	> 25	> 25	> 25	> 25	> 25
Voltage Standing Wave Ratio (VSWR)	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W) (dBc)	≤ -153	≤ -153	≤ -153	≤ -153	≤ -153
Input Power Continuous Wave (CW)	500 watts	500 watts	300 watts	300 watts	300 watts
Polarization	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground	DC Ground

BASTA Electrical Specifications*

Frequency Range	698-806 MHz	824-896 MHz	1850-1990 MHz	1695-1755/2110-2180 MHz	
Gain over all Tilts (dBi)	15.3	16.5	18.1	17.4	18.5
Gain over all Tilts Tolerance (dB)	0.6	0.4	0.3	0.4	0.6
Gain at Low-tilt (dBi)	15.4	16.7	17.9	17.2	18.5
Gain at Mid-tilt (dBi)	15.4	16.6	18.2	17.5	18.7
Gain at High-tilt (dBi)	15.1	16.2	18.2	17.5	18.3
Azimuth Beamwidth Tolerance (°)	2.3	1.1	2.7	2.9	3.0
Elevation Beamwidth Tolerance (°)	1.7	0.9	0.5	0.3	0.5
Electrical Downtilt Deviation (°)	1.0	0.7	0.8	0.7	1.0
Front-to-Back Ratio over ± 20° (dB)	22.9	24.7	27.0	28.0	26.6
First Upper Sidelobe Suppression (dB)	16.5	19.2	21.2	19.4	17.3
Upper Sidelobe Suppression peak to 20°(dB)	N/A	18.6	20.5	20.2	16.6

* Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V9.6.
All specifications are subject to change without notice.

Mechanical

Dimensions (LxWxD)	50.5x23.1x8.8 in (1283x587x224 mm)
Survival Wind Speed	> 125 mph (> 201 kph)
Front Wind Load	249 lbs (1108 N) @ 100 mph (161 kph)
Side Wind Load	106 lbs (473 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	9.7 ft ² (0.9 m ²)
Weight *	57.3 lbs (26.0 kg)
Connector	6 × 7-16 DIN female long neck
Mounting Pole	2 to 5 in (5 to 12 cm)

* Weight excludes mounting




SPECIFICATIONS

HexPort Multi-Band Antenna


HPA-33I-BWW-H4

Bottom View

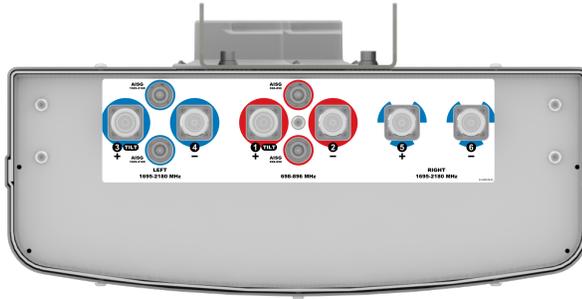

Mechanical

Connector Spacing

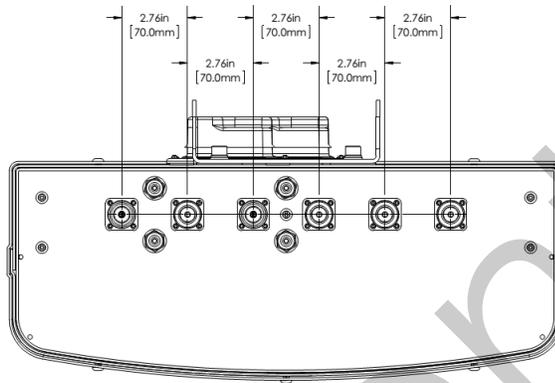




SPECIFICATIONS

HexPort Multi-Band Antenna


HPA-33I-BWW-H4

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

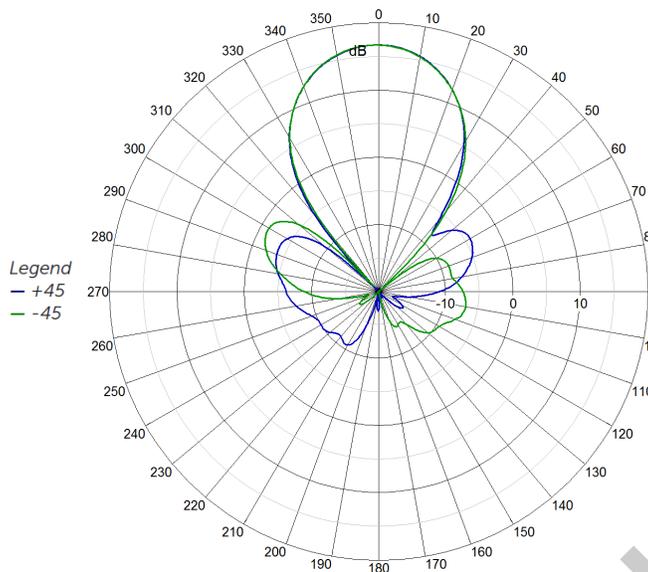


875 MHz Azimuth

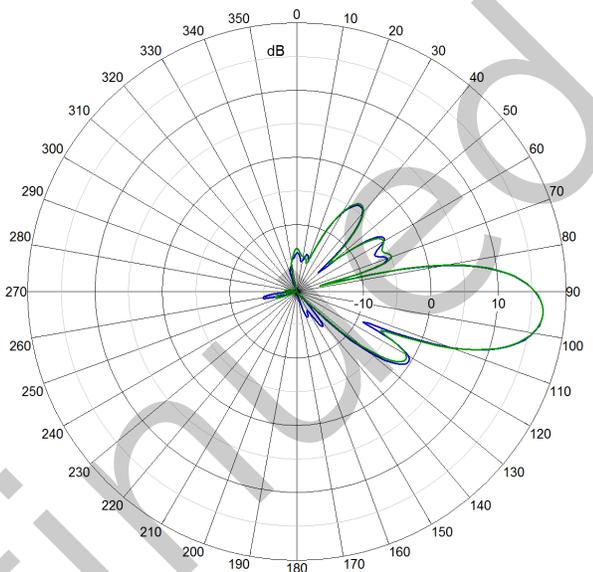

875 MHz Elevation 6°

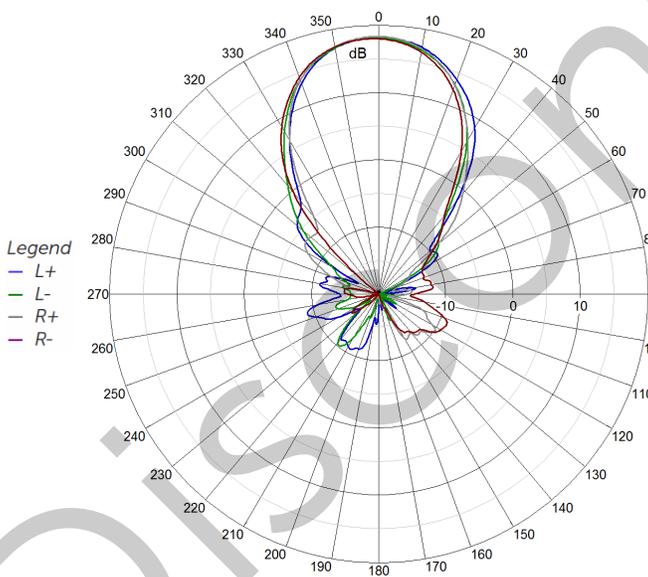

1948 MHz Azimuth

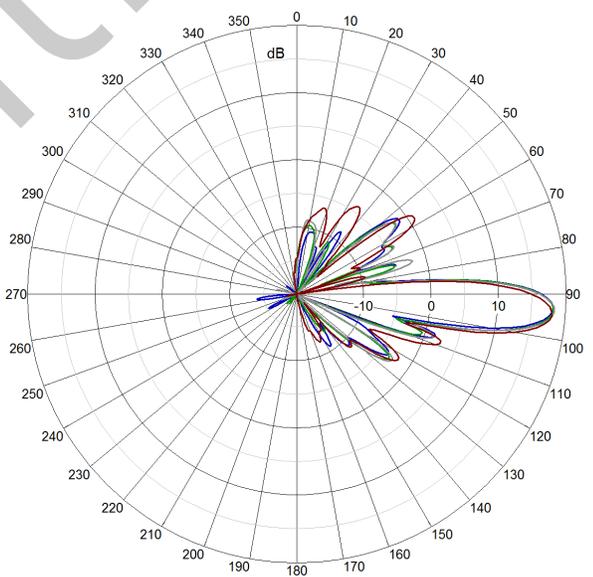

1948 MHz Elevation 4°



ORDERING

HexPort Multi-Band Antenna

HPA-33I-BWW-H4

Parts & Accessories

HPA-33I-BWW-H4 Four foot (1.3 m) HexPort antenna with 33° azimuth beamwidth and 2 factory installed BSA-RET400 RET actuators and MBK-02 mounting bracket

MBK-02 Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment

BSA-RET400 Remote electrical tilt actuator

Discontinued




Mounting Bracket Kit


MBK-02

Mechanical


Weight	9.8 lbs (4.4 kg)
Hinge Pitch	31.5 in (800 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M10
Installation Torque	15 ft-lbs (20 N·m)
Mechanical Tilt Adjustment	0° - 10°

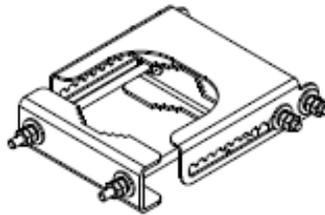

MBK-02 Top Adjustable Bracket

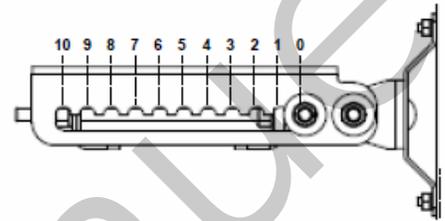

MBK-02 Top Adjustable Bracket Side View

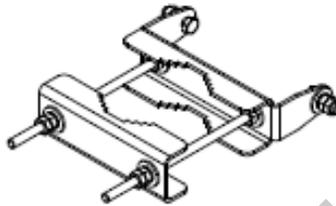

MBK-02 Bottom Fixed Bracket



Internal Remote Electrical Tilt (iRET)

BSA-RET400

General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	±0.1°
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

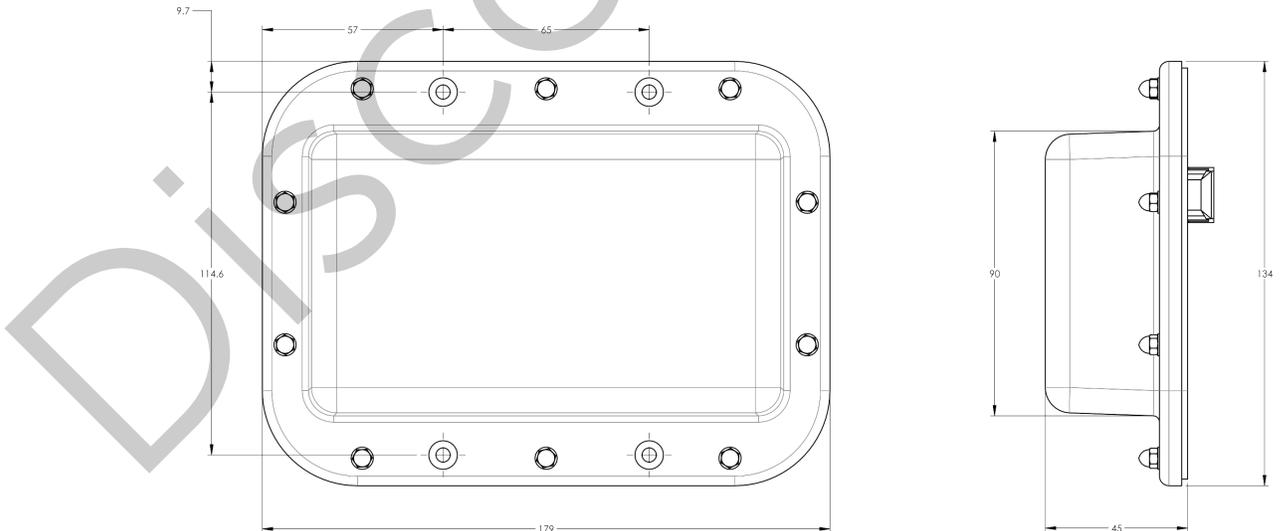



STANDARDS & CERTIFICATIONS

HexPort Multi-Band Antenna

HPA-33I-BWW-H4

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 606529, IP 24

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001



DISCONTINUED

