



# Antennas

DATA SHEET

## Mounting Bracket Kit

MBK-10



- This two part antenna mounting bracket is designed for use with many of CCI's larger antennas with a 600 mm hinge pitch
- Bracket kit has a fixed lower bracket and adjustable upper bracket that allows the antenna to be down tilted up to 10 degrees, in 1 degree increments (or uptilted if mounted in reverse)
- Rugged and weather resistant design
- Adjustable clamps fit poles from Ø2 – 5 inches (Ø51 – 127 mm)

### Overview

This adjustable tilt Pole Mounting Bracket is designed for use with CCI's larger antennas that use a 600 mm hinge pitch spacing. The MBK-10 bracket kit delivers a very stable mounting and is adjustable from 0 to 10 degrees of down tilt in 1 degree increments. The rugged design supports CCI's taller antennas while resisting the elements. The clamps adjust to fit pole diameters ranging from 2 – 5 inches (51 – 127 mm). CCI antenna brackets are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

### Applications

- Ideal for pole mounting in urban settings



# Antennas


## SPECIFICATIONS

### Mounting Bracket Kit


MBK-10

#### Mechanical


<b>Weight</b>	14.0 lbs (6.4 kg)
<b>Hinge Pitch</b>	23.6 in (600 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lb (54 Nm)
<b>Mechanical Tilt Adjustment</b>	0° - 10°

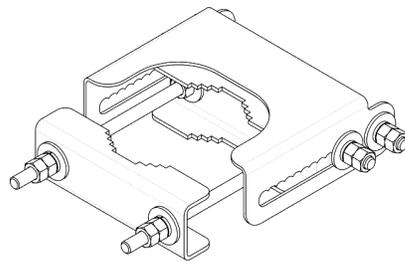

MBK-10 Top Adjustable Bracket

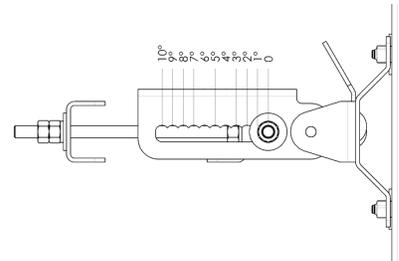

MBK-10 Top Adjustable Bracket Side View

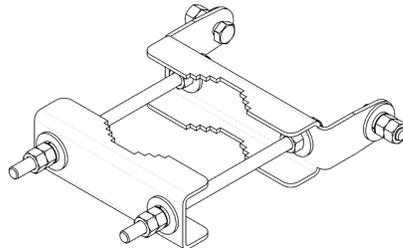

MBK-10 Bottom Fixed Bracket



# Antennas

ORDERING

Mounting Bracket Kit

MBK-10

Parts & Accessories

Model number MBK-10

Overall Weight 12.6 lbs (5.7 kg)