



# Antennas

DATA SHEET

## Mounting Bracket Kit

MBK-16



- This two part antenna mounting bracket is designed for use with many of CCI's taller antennas , 5 ft (1.5 m) or larger and with a 1200 mm hinge pitch when no mechanical tilt is required
- Bracket kit has a fixed lower and upper bracket and locks antenna at 0 degrees of mechanical tilt
- Rugged and weather resistant design
- Adjustable clamps fit poles from Ø2 – 5 inches (Ø51 – 127 mm)

### Overview

This Pole Mounting Bracket is designed for use with CCI's MultiPort, Bi-Sector and MultiSector antennas that are 5 feet tall or greater and have a hinge spacing of 1200 mm. The MBK-16 bracket kit delivers a very stable mounting and is fixed at 0 degrees of down tilt. The rugged design supports CCI's taller antennas while resisting the elements. The clamps adjust to fit pole diameters ranging from 2 – 5 inches (51 – 127 mm). CCI antenna brackets are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

### Applications

- Ideal for pole mounting in urban settings



# Antennas



## SPECIFICATIONS

### Mounting Bracket Kit

MBK-16

#### Mechanical

<b>Weight</b>	9.9 lbs (4.5 kg)
<b>Hinge Pitch</b>	47.25 in (1200 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lbs (54 Nm)
<b>Mechanical Tilt</b>	0°

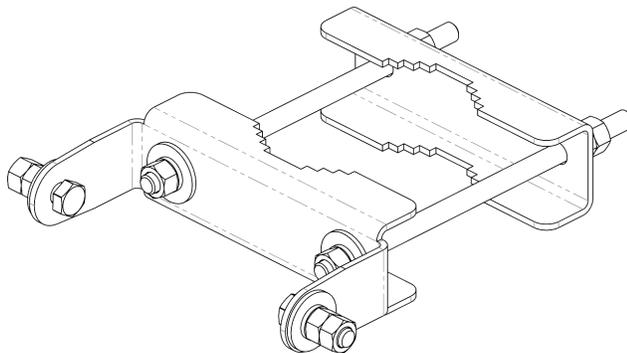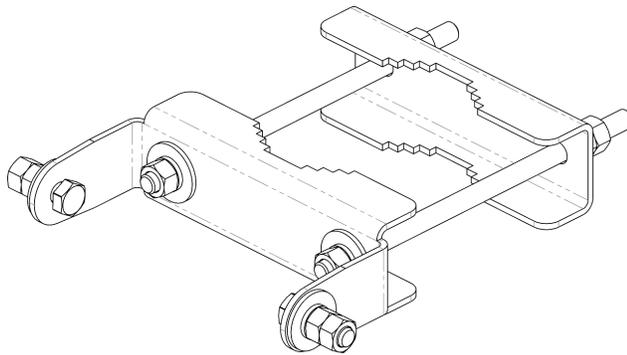

MBK-16 Top and Bottom Bracket



# Antennas

ORDERING

Mounting Bracket Kit

MBK-16

Parts & Accessories

**Model number** MBK-16

**Overall Weight** 9.9 lbs (4.5 kg)