




# Antennas

DATA SHEET

## Mounting Bracket Kit

MBK-36

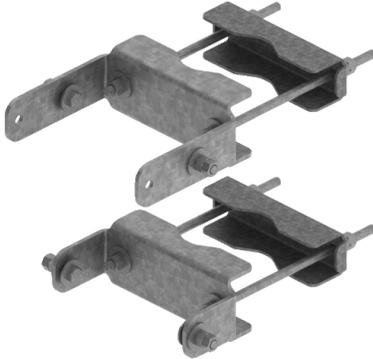

- This two part antenna mounting bracket is designed for use with CCI's QPA65R-E5C antenna
- Bracket has a smooth clamping feature
- Bracket kit has a fixed lower and upper bracket and locks antenna at either 0 or 5 degrees of mechanical tilt
- Bracket can be reconfigured if 5° of uptilt is desired
- Rugged and weather resistant design
- Adjustable clamps fit poles from Ø76 – 152 mm (Ø3 – 6 in) OD

### Overview

This Pole Mounting Bracket is designed for use with CCI's QPA65R-E5C antenna. The MBK-36 bracket kit delivers a very stable mounting and is fixed at either 0 or 5 degrees of mechanical tilt. The rugged design supports CCI's antennas while resisting the elements. The clamps adjust to fit pole diameters ranging from Ø76 – 152 mm (Ø3 – 6 in) OD.

CCI antenna brackets are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

### Applications

- Ideal for pole mounting in urban settings



# Antennas


## SPECIFICATIONS

### Mounting Bracket Kit


MBK-36

#### Mechanical

<b>Weight</b>	8.8 kg (19.4 lbs)
<b>Hinge Pitch</b>	946 mm (37.25 in)
<b>Mounting Pole Dimension</b>	76 to 152 mm (3 to 6 in) (OD by measurement)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	54 N·m (40 ft·lbs)
<b>Mechanical Tilt</b>	0°, 5°

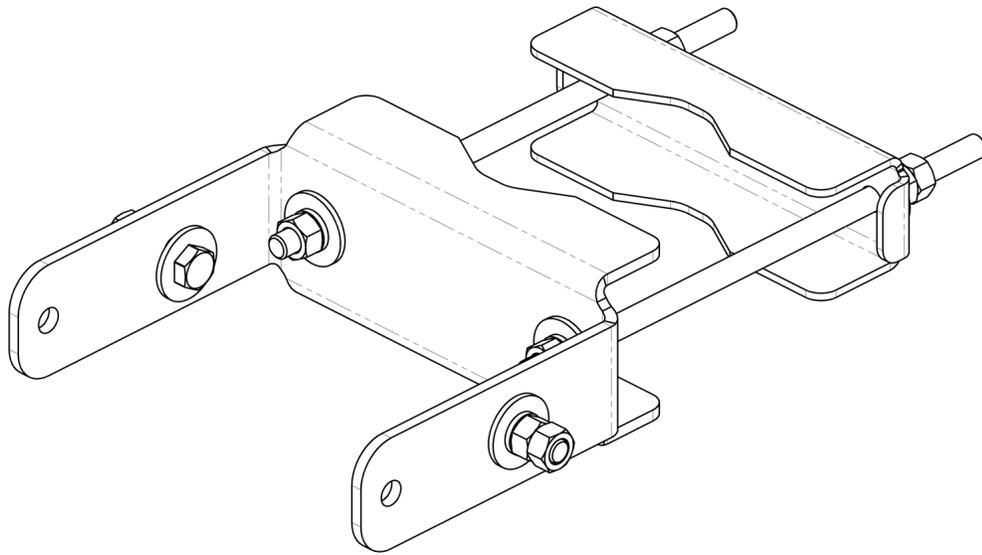

MBK-36 Top Bracket

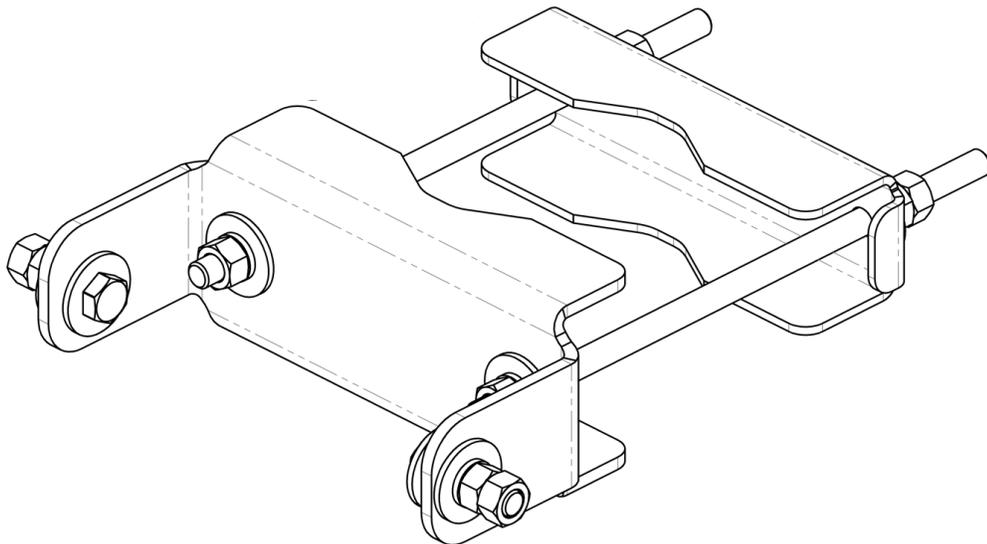

MBK-36 Bottom Bracket



# Antennas

ORDERING

Mounting Bracket Kit

MBK-36

Parts & Accessories

**Model number** MBK-36

**Overall Weight** 8.8 kg (19.4 lbs)